

Sub-wavelength imaging by wire media

Pavel A. Belov, Yang Hao, and Sunil Sudhakaran

Queen Mary College, University of London, Mile End Road, London, E1 4NS, United Kingdom

Original realization of a lens capable to transmit images with sub-wavelength resolution is proposed. The lens is formed by parallel conducting wires and effectively operates as a telegraph: it captures image at the front interface and the transmit it to the back interface without distortion. This regime of operation is called canalization and is inherent in flat lenses formed by electromagnetic crystals. The theoretical estimations are supported by numerical simulations and experimental verification. Sub-wavelength resolution of $\lambda/15$ and 18% bandwidth of operation are demonstrated at gigahertz frequencies. The proposed lens is capable to transport sub-wavelength images without distortion to nearly unlimited distances since the influence of losses to the lens operation is negligibly small.

PACS numbers: 78.20.Ci, 42.30.Wb, 41.20.Jb

Resolution of common imaging systems is restricted by the so-called diffraction limit, since they operate only with propagating spatial harmonics emitted by the source. Conventional lenses can not transmit evanescent harmonics which carry sub-wavelength information, since these waves exhibit exponential decay in usual naturally occurring materials. In order to overcome the diffraction limit it is required to use the other sort of materials for the construction of lenses. It is required to engineer an artificial material (metamaterial) with electromagnetic properties which dramatically differ from those of materials available in nature [1]. One of the options was suggested by Pendry in his seminal paper [2]. Pendry proposed to use left-handed materials, isotropic media with both negative permittivity and permeability [3]. The planar slab of such a metamaterial provides unique opportunities to restore and even amplify amplitudes of evanescent modes. This becomes possible due to resonant excitation of surface plasmons at the interfaces of left-handed material slab. However, the promising theoretical predictions meets numerous practical difficulties in the creation of left-handed metamaterials. On the one hand, the major problem is the creation of materials possessing magnetic properties at optical and terahertz frequencies [4, 5]. On the other hand, the issues related to losses play a very important role as well. The enumerated problems are closely related with fundamental restrictions and can be hardly overcome. The other option to reach the sub-wavelength resolution was suggested by Wiltshire [6, 7]. The idea is based on the use of an array of magnetic wires, so-called Swiss rolls [8] in order to transfer sub-wavelength information directly from the source to the image plane (pixel-to-pixel imaging principle). The lens formed by Swiss rolls have to be placed into the near field of the source since it is capable to transfer evanescent harmonics rather than amplify them. This realization of sub-wavelength imaging experiences similar problems as the design of left-handed medium: it is required to obtain a metamaterial with magnetic properties and also keep the losses to be small.

In the present paper we suggest an alternative opportunity of sub-wavelength lens construction. It does not require magnetic properties to be created. The imaging device is formed by an array of parallel conducting wires, so-called wire medium [9, 10, 11, 12], see Fig. 1. At the first sight it seems that this structure is electrical analogue of Wiltshire's system. An array of Swiss rolls, being similar to magnetic wires, is capable to transmit s-polarized (transverse electric, TE) spatial harmonics of the source spectrum. An array of wires operates in the same manner, but for p-polarized (transverse magnetic, TM) waves. In the other words, an array of Swiss rolls

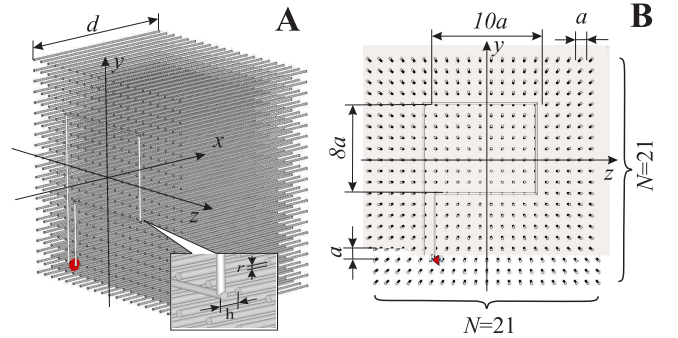


FIG. 1: Geometry of the flat lens formed by wire medium and the source of the form of letter P. (A) Perspective view. (B) Front view. Parameters: $a = 10\text{mm}$, $r = 1\text{mm}$, $d = 150\text{mm}$, $h = 5\text{mm}$, $f = 1\text{GHz}$.

restores at the back interface normal component of magnetic field produced by the source. An array of wires restores normal component of electric field. At the same time, there is a serious difference between the Wiltshire's system and slab of wire medium. Swiss rolls are artificial resonant structures which behave as magnetic wires only at the frequencies in vicinity of the resonance. This fact preconditions Swiss rolls to be narrow-band and very lossy. The conducting wires in this sense are natural electrical wires. It means that they are wide-band and practically lossless. The absence of strong losses (inherent in

Swiss rolls) in ordinary wires lifts restriction on the lens thickness. It allows to create sub-wavelength lenses of nearly arbitrary thickness and deliver images with sub-wavelength resolution into far-field region of the source and beyond. The imaging system effectively works as a telegraph formed by multi-conductor transmission line.

Different spatial harmonics incident to the front interface of the lens formed by a wire medium experience different reflection/transmission properties. It happens due to impedance mismatch between air and wire medium. The interface of wire medium has a surface impedance for p-polarization which is independent on incidence angle in contrast to the air which surface impedance varies for different angles of incidence. The reflections from the thin slabs are negligibly small, but become significant for thick layers. This problem can be solved by choosing an appropriate thickness of the slab in order to fulfill condition for Fabry-Perot resonance and reduce reflections. Actually, the reflections can be nearly cancelled out at all in the present case in contrast to the classical case of dielectric slab where it is possible to avoid reflection for normal incidence, but for oblique incidences some nonzero reflections are inevitable. For any incidence angle the wire medium supports propagating modes which travel across the slab with the same phase velocity equal to the speed of light, so-called transmission line modes [12]. If the slab thickness is chosen to be integer number of half-wavelengths then Fabry-Perot condition holds for any incidence angle (including complex ones) and such a slab experiences total transmission effect. This phenomenon of collective reduction of reflections for all incidence angles together with the fact that the waves are allowed to transfer energy only across the slab (along the wires) with a fixed phase velocity is called as canalization regime [13]. This regime can be observed in various electromagnetic crystals which possess flat isofrequency contours at certain frequencies [14, 15, 16]. The wire medium is an unique example of electromagnetic crystals with such properties observed at very long wavelengths as compared to the period of the crystal. It provides a possibility to reach nearly unlimited sub-wavelength resolution. Resolution of the lens formed by wire medium is restricted only by its period which can be made as small as it is necessary for certain applications. In the present case the resolution is equal to double period of the lattice: two different objects can be distinguished if they are located close to two different wires, but their location within one elementary cell can not be determined. It means that the wire medium lens has the best possible resolution among other periodical structures since Luo have shown in [17] that double period of the lattice is the maximum ultimate limit for resolution of superlenses formed by electromagnetic crystals.

In order to verify the concept described above, numerical simulations of the structure presented in Fig. 1 were performed using CST Microwave Studio package. The

lens consisting of 21×21 array of aluminium wires excited by a source in the form of P letter was modelled. The working frequency f is 1GHz, length of wires (thickness of slab) d is 15cm (half of wavelength), period of lattice a is 1cm, radius of wires r is 1mm. The source in the form of P letter is placed at $h = 5\text{mm}$ distance from the front interface of the lens and fed by a point current source $I = 1\text{A}$. Results of the simulation are presented in Fig. 2. The source produces sub-wavelength distribution of

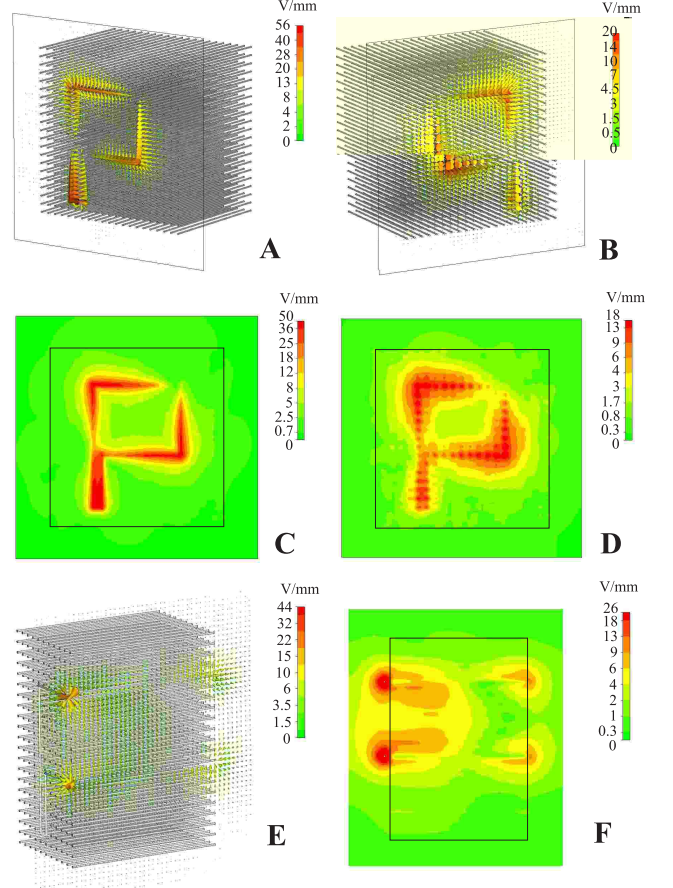


FIG. 2: Distribution of electric field and its absolute value: (A), (C) in vicinity of source (at 2.5mm distance from the front interface); (B), (D) in image plane (at 2.5mm distance from the back interface); (E), (F) in transverse plane

electrical field at the front interface of the slab, see Fig. 2.A. The p-polarized contribution of the field is canalized from the front interface to the back interface and forms an image, see Fig. 2.B. The quality of the imaging can be clearly seen in Fig. 2.C and D where absolute values of electrical field in vicinity of the front and back interfaces are plotted. The local maximums of intensity produced by terminations of the wires are visible in Fig. 2.D. The resolution of imaging in the present case is equal to 2cm (double period of the structure), which is one fifteenth of the wavelength ($\lambda/15$).

The canalization principle can be easily illustrated

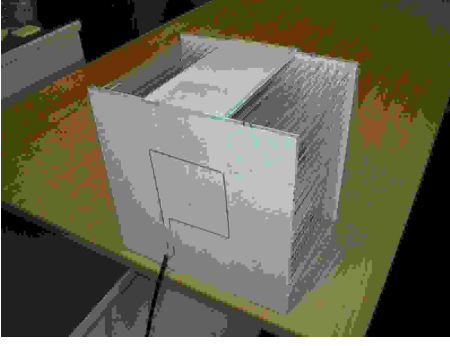


FIG. 3: Photo of wire medium lens used in the experiment

with the help of Figs. 2.E,F where distribution of electrical field in transverse plane is presented. Two sources (visible at the left sides of Figs. 2.E,F) produce both s- and p-polarized spatial harmonics. The s-polarized harmonics practically do not interact with wire medium since they have electric fields perpendicular to the thin wires. The lens behaves nearly as an air for such waves. Therefore, the s-polarized evanescent harmonics decay with the distance and practically disappear at the center of the slab: their contribution is visible only in vicinity of the front interface. In contrast to these waves, the p-polarized harmonics are guided by wires and canalized from the front interface to the back one. The trace of their propagation is visible inside the slab. This waves form an image at the back interface (right sides of Figs. 2.E,F).

Excellent correspondence between theoretical predictions and numerical simulations proves validity of the canalization regime. Further confirmation is also achieved by experimental verification. The slab of wire media with parameters as in Fig. 1 was constructed. Photo of the lens is available in Fig. 3. The wires are fixed by thin slabs of foam which has relative permittivity close to unity at frequencies around 1GHz. The source is an antenna in the form of the P letter directly fed by a coaxial cable and located at the surface of the foam (approximately 3mm away from the terminations of wires). The mechanical near-field scanning device was used for measurements of electrical field distribution in the source plane (5-7mm from the source and front interface of the lens) and image plane (4-6mm from the back interface of the lens). A short piece of wire (1cm long) connected to the central conductor of coaxial cable was used as a probe. The measurements have been done for x-,y- and z-orientations of the probe (see Fig. 1 for orientation of axes). The best quality of imaging was observed at 980MHz. This frequency corresponds to Fabry-Perot resonance and it is slightly lower than the theoretical value of 1GHz due to the tolerance of sample construction. The measurement results are presented in Fig. 4. The x-component of electrical field (normal to

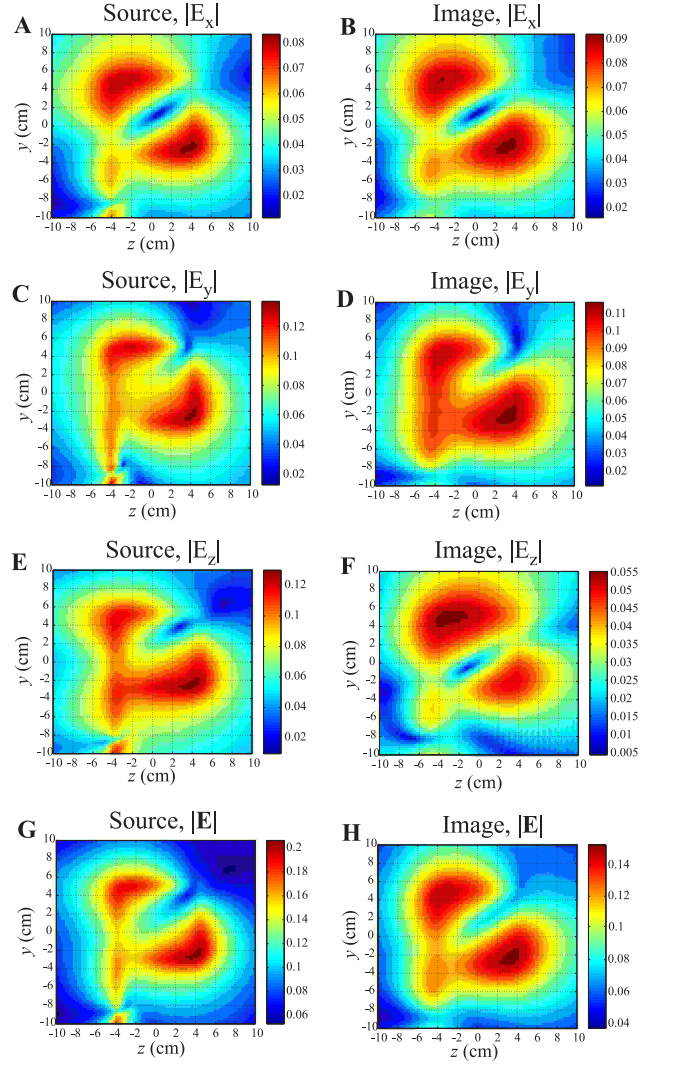


FIG. 4: Results of near field scan measurements: absolute values of x-, y- and z- electrical field components and total field in arbitrary units: (A,C,E,G) in source plane and (B,D,F,H) in image plane, respectively.

the interface) is nearly completely restored at the back interface, but some parts of y- and z- components, which have s-polarization are lost during the imaging. The absolute values of electrical fields in source and image planes are plotted in Figs. 4.G,H for comparison with Figs. 2.C,D. The probe used for the measurements does not allow to determine exact value of the local field: it actually provides an averaged value by a volume about $1\text{cm} \times 1\text{cm} \times 1\text{cm}$ around the probe. That is why the maxima visible at Fig. 2.D related to the terminations of the wires can not be observed at Fig. 4.H. In spite of that the general behaviour of the measured field and distribution predicted by numerical simulations are identical.

Further experimental studies show that the imaging with 2cm resolution observed at 980MHz keeps within 920MHz–1.1GHz frequency range. It means the the

bandwidth of the wire medium lens is about 18% which is incomparably wider than bandwidth of operation for the Swiss rolls. The similar imaging effects are also experimentally observed within 1.9–2.1 GHz frequency range. It corresponds to the Fabry-Perot resonance appearing when the thickness of the slab is equal to the whole wavelength. This confirms that the imaging exists when the thickness of slab becomes equal to integer number of half-wavelengths and observed effects are well described by the canalization regime. Therefore, the lens can be made arbitrary thick and no distortions will appear. The ohmic losses caused by the currents in the wires do not disturb the imaging quality. These losses are only able to reduce intensity of the image, in the same manner as it happens in long multi-conductor transmission lines.

In conclusion, it is necessary to note that in the present paper we proposed the lens formed by conducting wires capable to transmit images with sub-wavelength resolution for long distances as compared to the wavelength. The lens operates in the canalization regime when any incident spatial harmonics transforms inside the crystal into the plane waves which deliver image from one interface to another. The plane waves in the crystal travel with the same phase velocity which allows to tune thickness of the slab to fulfill Fabry-Perot condition for any incident angle and achieve total transmission. This imaging effect was verified both numerically and experimentally at gigahertz frequencies. The sub-wavelength resolution of $\lambda/15$ and 18% bandwidth of operation are demonstrated. It is shown that the system is not sensitive to losses in the wires. All listed effects become possible only due to presence of transmission line modes in wire medium and strong spatial dispersion [12]. The wire medium effectively becomes anisotropic dielectric with infinite permittivity along anisotropy axis and it is caused not by frequency resonance as in the case of Swiss rolls but by strong spatial dispersion effect. Following [12], the component of wire medium permittivity tensor corresponding to the direction along the wires in the spectral region has the form:

$$\varepsilon_{\parallel}(\omega, q) = \varepsilon_0 \left(1 - \frac{k_0^2}{k^2 - q^2} \right),$$

where ω is frequency, q is component of wave vector along wires, $k = \omega/c$ is wavenumber, c is the speed of light and k_0 is wavenumber corresponding to the plasma frequency. The transmission line modes travel along wires and have $q = k$. It means, that for such modes the wire medium effectively has infinite permittivity. The losses in wires influence to the plasma frequency making it complex [18] and thus do not affect the value of permittivity corresponding to transmission line modes.

The present realization of canalization regime with the help of wire medium is advantageous at microwave frequencies, but it can not be realized at optical range where metals lose their conducting properties. It does

not mean that implementation of canalization regime in optical range is impossible. This regime can be realized using photonic crystals [13, 19, 20], but resolution of such lenses will be restricted by period of the crystals which can not be reduced too much due to absence of high-contrast lossless materials at the optical range. The other possibility is to construct uniaxial material with infinite permittivity along anisotropy axis. It can be done using lattices of resonant uniaxial nanoparticles or multilayered structures [21, 22].

The authors acknowledge Mr. John Dupuy for the construction of the lens. P.A.B. would like to thank Dr. Stanislav Maslovski who originally brought to his attention the idea of the image transfer using wire medium in 2002, and Profs. Constantin Simovski and Sergei Tratyakov for useful discussions.

-
- [1] D. Smith, J. Pendry, and M. Wiltshire, *Science* **305**, 788 (2004).
 - [2] J. Pendry, *Phys. Rev. Lett.* **85**, 3966 (2000).
 - [3] V. Veselago, *Sov. Phys. Usp.* **10**, 509 (1968).
 - [4] T. Yen, W. Padilla, N. Fang, D. Vier, D. Smith, J. Pendry, D. Basov, and Z. Zhang, *Science* **303**, 1494 (2004).
 - [5] S. Linden, C. Enkrich, M. Wegener, J. Zhou, T. Kochny, and C. Soukoulis, *Science* **306**, 1351 (2004).
 - [6] M. Wiltshire, J.B.Pendry, I. Young, D. Larkman, D. Gilderdale, and J. Hajnal, *Science* **291**, 849 (2001).
 - [7] M. Wiltshire, J. Hajnal, J.B.Pendry, and D. Edwards, *Optics Express* **11**, 709 (2003).
 - [8] J. Pendry, A. Holden, D. Robbins, and W. Stewart, *IEEE Trans. Microw. Theory Techn.* **47**, 195 (1999).
 - [9] W. Rotman, *IRE Trans. Ant. Propag.* **10**, 82 (1962).
 - [10] J. Brown, *Progress in dielectrics* **2**, 195 (1960).
 - [11] J. Pendry, A. Holden, W. Steward, and I. Youngs, *Phys. Rev. Lett.* **76**, 4773 (1996).
 - [12] P. Belov, R. Marques, S. Maslovski, I. Nefedov, M. Silverinha, C. Simovski, and S. Tretyakov, *Phys. Rev. B* **67**, 113103 (2003).
 - [13] P. Belov, C. Simovski, and P. Ikonen, *Phys. Rev. B* **71**, 193105 (2005).
 - [14] H.-T. Chien, H.-T. Tang, C.-H. Kuo, C.-C. Chen, and Z. Ye, *Phys. Rev. B* **70**, 113101 (2004).
 - [15] Z.-Y. Li and L.-L. Lin, *Phys. Rev. B* **68**, 245110 (2003).
 - [16] C.-H. Kuo and Z. Ye, *Phys. Rev. E* **70**, 056608 (2004).
 - [17] C. Luo, S. G. Johnson, J. D. Joannopoulos, and J. B. Pendry, *Phys. Rev. B* **68**, 045115 (2003).
 - [18] S. Maslovski, S. Tretyakov, and P. Belov, *Microw. and Optical Technol. Lett.* **35**, 47 (2002).
 - [19] C. Luo, S. G. Johnson, J. D. Joannopoulos, and J. B. Pendry, *Phys. Rev. B* **65**, 201104 (2002).
 - [20] P. V. Parimi, W. T. Lu, P. Vodo, and S. Sridhar, *Nature* **426**, 404 (2003).
 - [21] S. A. Ramakrishna, J. B. Pendry, M. C. K. Wiltshire, and W. J. Stewart, *Journal of Modern Optics* **50**, 1419 (2003).
 - [22] S. A. Ramakrishna and J. B. Pendry, *Phys. Rev. B* **67**, 201101 (2003).