Electric Field E ects on the Di use Scattering in PZN-8% PT

 $P.M.Gehring,^1 K.Ohwada,^2$ and $G.Shirane^3$

¹N IST Center for Neutron Research, National Institute of Standards and Technology, Gaithersburg, Maryland 20899-8562 ²Synchrotron Radiation Research Center (at SPring 8),

Japan Atom ic Energy Research Institute, Sayo-gun Hyogo 679-5148, Japan and ³Department of Physics, Brookhaven National Laboratory, Upton, New York 11973-5000 (Dated: February 5, 2020)

We report measurements of the neutron di use scattering from a single crystal of the relaxor ferroelectric PbZn₁₌₃Nb₂₌₃O₃ doped with 8% PbTiO₃ (PZN-8% PT) for temperatures 100 K T 530 K and electric elds 0 kV/cm E 10 kV/cm. The di use scattering is strongly suppressed transverse to the (003) B ragg peak at 400 K for E = 2 kV/cm applied along the [001] direction. However, no change in the di use scattering is observed transverse to (300), even for eld strengths up to $10 \, \text{kV/cm}$. Thus the application of an external electric eld in the tetragonal phase does not produce a macroscopically polarized state. This unusual behavior can be understood within the context of the Hirota et al. phase-shifted polar nanoregion (PNR) model of the relaxor di use scattering, since an electric eld E oriented parallel to [001] would remove the shift of the nanoregions along [001] while preserving those along the orthogonal [100] direction.

PACS num bers: 61.12.-q, 77.65.-j, 77.84 Dy

I. INTRODUCTION

The shape, size, density, and orientation of the polar nanoregions (PNR) that form below the Burns tem perature T_d^1 in the lead-oxide class of relaxors Pb ($Zn_{1=3}Nb_{2=3}$)O 3 and Pb ($Mg_{1=3}Nb_{2=3}$)O 3 doped with PbTiO₃ (PZN-xPT and PM N-xPT, respectively) are key param eters of interest to many researchers attempting to clarify the various mechanisms responsible for the exceptional piezoelectric properties exhibited by these materials.² First identi ed through opticalm easurem ents of the index of refraction by Burns and D $acol_{i}^{1}$ the presence of PNR have been correlated with the onset of neutron diffuse scattering in PMN, 3 a saturation of the unit cell volum e below T_d , and the overdam ping of long-wavelength phonon modes in PZN and PZN-8% PT. 5,6 More recently an important model concerning the relationship between the PNR and the surrounding cubic lattice was presented by Hirota et al. Based on neutron time-of-ight measurem ents of the di use scattering in PMN at 300K perform ed by Vakhrushev et al, 8 H irota et al. noticed that the corresponding ionic displacem ents could be decom posed into a scalar shift (displacement) common to all atom s, and a pattern of shifts that satis es a center-ofm ass condition. 9 It was further shown that these centerofm ass shifts are consistent with neutron inelastic measurem ents of the soft TO phonon intensity in PMN above T_d, thus providing compelling evidence that the polar nanoregions result from the condensation of a soft mode at the Bums tem perature.

Subsequent m easurem ents on PZN-8% PT using neutron di raction techniques by Ohwada et al. demonstrate that the zero-eld cooled structure at low temperature is not rhombohedral as had been previously believed. Instead, surprising evidence of a new phase, called phase X, was found that exhibits an average cubic unit cell structure. These ndings motivated the high-

energy x-ray study by Xu et al. on pure PZN, 11 and the high-resolution neutron study by Gehring et al. on PMN-10% PT. 12 Both of these studies revealed a low-tem perature bulk phase that is not rhom bohedral, but rather consistent with the phase X observed by O hwada et al. in PZN-8% PT. It has been suggested that the phase-shifted nature of the PNR could be responsible for stabilizing phase X at low tem peratures as the uniform shift of the PNR would present a natural energy barrier in the system against the form ation of a uniform polar state

To shed more light on this idea, we have performed a study of the PNR in PZN-8% PT by measuring the response of the neutron di use scattering below the cubicto-tetragonal phase transition temperature T_c to an external electric eld E.As is well known, a classic ferroelectric system will break into many domains below T_c, and the application of an electric eld can produce a nearly uniform polar state by aligning all of the domains via dom ain wall motion. In the case of the relaxor ferroelectric PZN-8% PT, however, our data show that for E oriented parallel to the [001] direction, only the diffuse scattering transverse to the (003) reciprocal lattice point decreases. The di use scattering transverse to the orthogonal (300) position is una ected. Thus a macroscopic uniformly polarized state is not achieved. The model of phase-shifted PNR provides a possible explanation for these ndings, as an electric eld along [001] would remove the PNR shift along [001] while preserving that along [100].

II. EXPERIM ENTAL DETAILS

The neutron scattering data presented here were obtained on the BT9 triple-axis spectrom eter located at the N IST Center for Neutron Research. The di use scatter-

ing near the reciprocal lattice points (300) and (003) was measured at a $\,$ xed neutron energy $\rm E_i=\rm E_f=14.7m\;eV$ ($=2.36\rm\,A$) using the (002) re ection of highly-oriented crystals of pyrolytic graphite (HOPG) as monochrom ator and analyzer. Horizontal beam collimations were $40^0\text{-}46^0\text{-}$ S-40 $^0\text{-}80^0$ (S = sam ple).

The high-quality single crystal of PZN-8% PT used in this study was grown by the ux solution method¹³ at the Pennsylvania State University. It is a sister crystal to the one used by 0 hwada et al. in an earlier study, some results from which are presented in this paper. 10 The crystalweighs $1.1 \, \text{gm}$ ($0.15 \, \text{cm}^3$), and is a rectangular block with 100 faces and dimensions 72 6:9 3:0 m m³. Gold electrodes were plated onto the two largest surfaces of the crystal to which thin gauge copper wires were attached using a red-on silver conductive adhesive epoxy cured at 100C for 2 hours. In this geometry the eld is always applied along a cubic [001] axis. These wires were twisted and soldered onto leads connected to a high voltage power supply. Tests were performed both before and after the experim ent to verify that the voltage set by the power supply appeared across the sample. The dierence between the set and measured voltage drop was always less than 1%.

The crystalwasm ounted onto an electrically insulating boron nitride post using boron nitride paste to provide a strain-free environment for the sample. The crystal [010] axis was oriented vertically, giving access to rections of the form (h0l). The sample holder assembly was then mounted inside the vacuum space of a high-temperature closed-cycle ³He refrigerator, which was subsequently positioned and exed onto the goniometer of the BT9 spectrometer.

III. DIFFUSE SCATTERING

The PZN-8% PT phase E-T diagram has been mapped out by O hwada et al., and is shown in Fig. 1. 10 The data presented in the top panel were taken while cooling in a constant electric eld, whereas those shown in the bottom panel were taken with increasing eld at xed temperature after rst cooling in zero eld. The electric eld acts to stabilize the tetragonal phase as can be seen from the slope of the tetragonal (T) to cubic (C) phase boundary in Fig. 1(a), where the transition temperature increases with eld. The transition temperatures, represented by the circles in Fig. 1, were determined from measurements of the lattice constants (B ragg peaks). But while this relaxor compound clearly exhibits a tetragonally-distorted structure, the precise nature of the polar order is still unknown.

Im portant inform ation can be obtained about the polar order in the tetragonal phase of PZN-8% PT through m easurem ents of the di use scattering. Fig. 2 shows neutron scattering measurem ents taken by 0 hwada et al. (on a di erent PZN-8% PT single crystal, but grown using the same technique) near the (003) reciprocal lattice

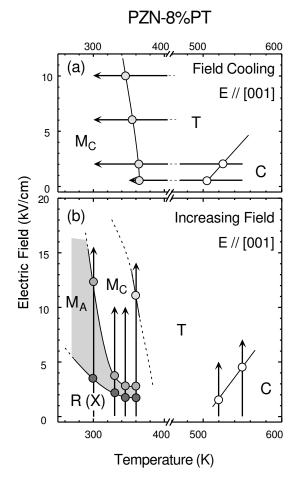


FIG. 1: The E T phase diagram of PZN-8% PT determ ined by O hwada et al. The notations C, T, M, and R refer to cubic, tetragonal, monoclinic, and rhombohedral phases, respectively. The arrows point in the scan direction, while the length of the arrows correspond to the scan range. The circles denote the transition temperatures determined from each scan

position, for which the di use scattering structure factor is known to be strong. ¹⁰ The intensity at Q = (0.04,0,3)is shown as a function of temperature at $E = 0 \, kV / cm$ (solid circles) and 3 kV/am (open circles), with the eld applied along the [001] direction. In the cubic phase at high temperature (T 520K) the di use scattering intensities are equal, indicating no eld dependence. However at lower temperatures, in the tetragonal phase, the di use scattering is strongly suppressed by the eld while the zero-eld di use scattering intensity remains strong and increases with cooling. For purposes of com parison, the integrated B ragg intensity m easured at (002) in zeroeld is shown (scale on the right-hand side of Fig. 2). The Bragg intensity increases sharply below 500K, which is consistent with the slope of the T-C phase boundary in

The data in Fig. 2 were obtained at a xed Q value at two di erent eld values. Information about the geometry of the di use scattering is presented in Fig. 3,




FIG. 2: Tem perature dependence of the neutron di use scattering at Q=(0.04,0,3) in zero eld (solid circles) and E=3kV/cm // [001] (open circles). The zero-eld Bragg intensity measured at (002) is shown as a function of tem perature by the solid triangles. These data were taken by 0 hwada et al. on a di erent single crystal of PZN-8% PT.

which compares the di-use scattering intensity measured at severaldi erent reciprocallattice points at a xed eld strength of 2 kV/cm oriented along the [001] axis. The intensities measured around the (003) position (open circles) decrease upon cooling in eld in agreement with the data of Fig. 2. However the striking behavior revealed in this gure is the that the di-use intensities measured around the orthogonal (300) position remain high, much like the zero-eld data shown in Fig. 2. The vertical arrows in this gure indicate the phase transition tem-peratures $T_{\rm M}$ $_{\rm T}$ and $T_{\rm T}$ $_{\rm C}$ between the monoclinic and tetragonal, and tetragonal and cubic phases, respectively.

To clarify this behavior wide scans were made of the scattered neutron intensity as a function of the reduced momentum transfer q transverse to both the (300) and (003) B ragg positions as a function of eld and temperature. The resulting data are plotted on a log-intensity scale in Fig. 4. The top two panels display transverse q-scans in zero eld, and the bottom two panels show the same scans taken after cooling the sample in a $2\,\mathrm{kV/cm}$ eld. In the cubic phase at $500\,\mathrm{K}$ we observe di use scattering of roughly equal intensity in zero eld along directions transverse to both Q = (300) and (003). This scattering does not change when an external electric eld of $2\,\mathrm{kV/cm}$ is applied along the [001] direction. In

eld of 2 kV/cm is applied along the [001] direction. In the tetragonal phase at 400K the di use scattering in zero eld increases slightly, becoming somewhat stronger around (003) compared to (300). Then when the sample is eld cooled, the di use scattering transverse to (003) is reduced substantially, as is suggested by the data shown in Fig. 3. Remarkably, however, the di use scattering transverse to (300) is una ected. This latter result indicates that the application of a 2 kV/cm eld is insu —




FIG. 3: Comparison of the di use scattering intensities measured near (300) (solid symbols) and (003) (open symbols) as a function of temperature in a eld of 2kV /cm applied along [001].

cient to produce a uniform polarization in the tetragonal phase. The dotted line in the lower left panel of Fig. 4 indicates the measured instrumental (Gaussian) resolution function. Although data are not shown, the same behavior was observed at $300\,\mathrm{K}$ in the monoclinic phase of PZN-8% PT as in the tetragonal phase at $400\,\mathrm{K}$.

An e ort was made to determ in e the eld strength E at which the di use scattering transverse to (300) begins to decrease. Fig. 5 shows the di use scattering intensity m easured at Q = (3.0, -0.06) at $450 \,\mathrm{K}$, still in the tetragonalphase, from zero to 10 kV/cm. All of these data were taken as a function of increasing electric eld strength after rst eld cooling from 520 K in a eld of 2 kV/cm except for the zero eld data point, which was obtained after zero- eld cooling. The solid and open circles are successive measurements at the same temperature and Q. The solid square shows the di use scattering intensity at $450 \, \text{K}$ at $E = 2 \, \text{kV/cm}$. These data clearly reveal the inability of even a strong external electric eld to dim in ish the di use scattering orthogonal to the eld direction. Hence the underlying mechanism responsible for the di use scattering in PZN-8% PT must have an energy barrier that is su ciently large in order to stabilize it against external elds of at least 10 kV/cm.

IV. DISCUSSION

The results on PZN-8% PT presented here are signi - cant not because the di use scattering measured transverse to (003) is suppressed by an external electric eld,




FIG. 4: A log-scale comparison of the di use scattering intensities measured transverse to the (300) (open circles) and (003) (solid circles) reciprocal lattice positions at 400 K (tetragonal phase) and 500 K (cubic phase). The top panels show data in zero eld, and the bottom panels show data in an electric eld of $2\,\mathrm{kV/cm}$ (bottom panels) applied along [001]. The dashed line in the lower left panel represents the instrumental transverse q-resolution.




FIG. 5: Plot of the di use scattering intensity m easured in the tetragonal phase at (3.0,-0.06) at $450\,\mathrm{K}$ as a function of increasing eld strength applied along the [001] direction. The open and solid circles represent independent m easurem ents. The solid square corresponds to the di use scattering intensity at $2\,\mathrm{kV}$ /cm at (0.06,0,3) for comparison.

but rather because the di use scattering measured transverse to (300) is not. Independent of any model, our data provide unam biquous evidence that the eld-induced polar state in this im portant relaxorm aterial is not macroscopically uniform. This unusual nding must therefore be explained by any model that purports to address the fundam ental properties of these lead-oxide relaxor com pounds. While not unique, we believe that the concept of the phase-shifted polar nanoregions provides a natural explanation for the observed eld and Q -dependence of the di use scattering in PZN 8% PT. This phase shift, or uniform displacement, of the PNR occurs with respect to the surrounding cubic lattice at the Burns temperature T_d where the PNR condense from the soft TO phonon mode (see the top panel in Fig. 6). This soft TO mode is in fact coupled to the TA mode as sst shown by Naberezhnov et al, and later studied by Wakimoto et al.3,14 The uniform phase shift is believed to result from the fact that the soft TO mode is actually a soft-coupled mode that contains a signi cant transverse acoustic component, an idea originally proposed by Yam ada and Takakura. 15

The results of our study can be explained quite sim ply on the basis of the shifted nature of the PNR, as illustrated by the three-panel schematic diagram shown in Fig. 6. In the top panel, the system is in the cubic phase, below the Burns tem perature. The white squares represent the non-polar regions of the lattice (note that these are not individual unit cells), while the PNR are shown as the red hatched regions (corresponding to som ething of the order of 10 unit cells), which are slightly displaced in di erent directions from the cubic lattice. The arrows represent the direction and size of the uniform shift, which occurs in the direction of the PNR polarization. In the tetragonal phase $(T < T_c)$ the lattice develops its own polarization as indicated by the red dotted shading, while the uniform shift of the PNR remains intact (see the upper left panel of Fig. 4). Under the application of an external electric eld, the shifts antiparallel to E are rem oved, thereby reducing the local disorder, and in turn suppressing the di use scattering. (As it is unclear how much of the di use scattering transverse to the (003) reciprocal lattice position remains (see the lower left-hand panel of Fig. 4), we can only speculate that parallel shifts may be una ected.) But the orthogonal PNR shifts are una ected, and hence the corresponding di use scattering is also una ected. Thus a macroscopically ordered polar phase is not achieved in this system, even under applied electric eld strengths up to 10 kV/am.

Interesting high-q resolution studies in zero eld have now been performed by Gehring et al. on PMN-10% PT, and Xu et al. on PMN-20% PT and PMN-27% PT. 12,16 These studies have exam ined the low-tem perature phase in the PMN-xPT system, and document the existence of phase X up to PbTiO $_3$ concentrations as high as 20%. The 27% sample nally exhibits the expected rhombohedral phase. The stability of this new phase X against the formation of a global rhombohedral polar phase at

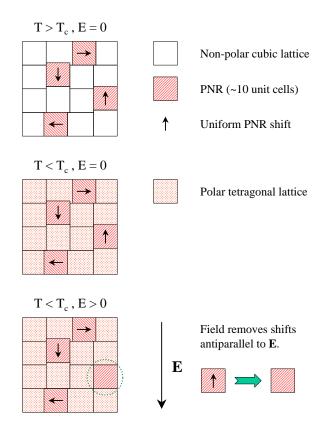


FIG. 6: Top panel: Phase-shifted PNR embedded in a non-polar cubic lattice for $T > T_{\rm c}$. M iddle panel: Below $T_{\rm c}$ the lattice achieves a polarization of its own, but the phase shift remains. Bottom panel: An applied electric eld removes shifts along E, while preserving those that are orthogonal.

tem peratures below $\rm\,T_{c}$ can also be understood in term s of the phase-shifted PNR m odel. The latter study by X u et al. in particular demonstrates that phase X is both undistorted and rhom ohedrally polarized.

V. ACKNOW LEDGM ENTS

We would like to thank R. Erwin, Y. Fujii, K. Hirota, C. Stock, and S. Wakim oto, for stimulating discussions, and P. W. Rehrig for supplying the high quality PZN-8% PT single crystal. We acknowledge nancial support from the U.S.Dept. of Energy under contract No.DE-AC02-98CH10886. We also acknowledge the U.S.Dept. of Commerce, NIST Center for Neutron Research, for providing the neutron scattering facilities used in this study.

G. Burns and F. H. Dacol, Solid State Commun. 48, 853 (1983); ibid, Phys. Rev. B 28, 2527 (1983).

S.E. Park and T.R. Shrout, J. Appl. Phys. 82, 1804 (1997).

³ A. Naberezhnov, S. B. Vakhrushev, B. Domer, and H. Moudden, Eur. Phys. J. B 11, 13 (1999).

J. Zhao, A. E. G azounov, Q. M. Zhang, and B. Toby, Appl. Phys. Lett. 72, 1048 (1998).

⁵ P.M. Gehring, S.E. Park, and G. Shirane, Phys. Rev. B 63, 224109 (2001).

⁶ P.M. Gehring, S.E. Park, and G. Shirane, Phys. Rev. Lett. 84, 5216 (2000).

⁷ K.Hirota, Z.-G. Ye, S.W akim oto, P.M. Gehring, and G. Shirane, Phys. Rev. B 65, 104105 (2002).

⁸ S.B. Vakhrushev, B.E. K vyatkovksy, A.A. Naberezhnov, N.M. Okuneva, and B. Toperverg, Ferroelectrics 90, 173 (1989).

⁹ J.Harada, J.D.Axe, and G.Shirane: Phys.Rev.B 4, 155 (1971).

¹⁰ K.Ohwada, K.Hirota, P.W.Rehrig, Y.Fujii, and G. Shirane, Phys.Rev.B 67,094111 (2003).

¹¹ G. Xu, Z. Zhong, Y. Bing, Z.-G. Ye, C. Stock, and G. Shirane, Phys. Rev. B 67, 104102 (2003).

P. M. Gehring, W. Chen, Z.-G. Ye, and G. Shirane, cond-mat/0304289.

¹³ M.-L. Mulvihill, S.-E. Park, G. Risch, Z. Li, K. Uchino, and T.-R. Shrout, Jpn. J. Appl. Phys. 35, 3984 (1996).

¹⁴ S.W akim oto, C.Stock, Z.G.Ye, W.Chen, P.M.Gehring, and G.Shirane, Phys. Rev. B 66, 224102 (2002).

Y.Yam ada and T.Takakura, cond-m at/0209573.

¹⁶ G.Xu, D. Viehland, J. Li, P.M. Gehring, and G. Shirane, cond-m at/0307144.