

SUB- AND SUPERSONIC HEAT MOTION INDUCED BY FEMTOSECOND LASER PULSES

Janina Marciak-Kozłowska*

Institute of Electron Technology, Al. Lotników 32-46, 02-628 Warsaw Poland.

Mirosław Kozłowski

*Institute of Experimental Physics and Physics Teacher College, Warsaw
University, Hoża 69, 00-681 Warsaw, Poland.*

**corresponding author*

Abstract

In this paper the superheating of electron plasma by femtosecond laser pulses is investigated. With Heaviside thermal equation (*Lasers in Engineering*, **12**, (2002), p. 17) the generation of superhot electrons is described. It is shown that in hot electron plasma (i.e. with electron energies > 5 MeV) the thermal shock waves can be generated.

Key words: Femtosecond laser pulses; Hot electron plasma; Shock thermal waves.

1 Introduction

Recently it has become possible to produce MeV electrons with short-pulse multiteravat laser system [1]. The fast ignitor concept [2, 3] relevant to the inertial confinement fusion enhances the interest in this process. In an underdense plasma, electrons and ions tend to be expelled from the focal spot by the ponderomotive pressure of an intense laser pulse, and the formed channel [4, 5] can act as a propagation guide for the laser beam. Depending on the quality of the laser beam, the cumulative effects of ponderomotive and relativistic self focusing [5] can significantly increase the laser intensity. For these laser pulses, the laser electric and magnetic fields reach few hundreds of GV/m and megagauss, respectively, and quiver velocity in the laser field is closed to the light speed. The component of the resulting Lorentz force ($-ev \times \vec{B}$) accelerates electrons in the longitudinal direction, and energies of several tens of MeV can be achieved [6]. Recently the spectra of hot electrons (i.e. with energy in MeV region) were investigated. In paper [7] the interaction of 500 fs FWHM pulses with CH target was measured. The electrons with energy up to 20 MeV were observed. Moreover for electrons with energies higher than 5 MeV the change of electron temperature was observed: from 1 MeV (for energy of electrons < 5 MeV) to 3 MeV (for energy of electrons > 5 MeV). In this paper the interaction of femtosecond laser pulse with electron plasma will be investigated. Within the theoretical framework of Heaviside temperature wave equation, the heating process of the plasma will be described. It will be shown that in vicinity of energy of 5 MeV the sound velocity in plasma reaches the value $\frac{c}{\sqrt{3}}$ and is independent of the electron energy.

2 The model

The mathematical form of the hyperbolic quantum heat transport was proposed in [8] and [9]. Under the absence of heat or mass sources the equations can be written as the Heaviside equations:

$$\frac{1}{v_\rho^2} \frac{\partial^2 \rho}{\partial t^2} + \frac{1}{D_\rho} \frac{\partial \rho}{\partial t} = \frac{\partial^2 \rho}{\partial x^2} \quad (1)$$

and

$$\frac{1}{v_T^2} \frac{\partial^2 T}{\partial t^2} + \frac{1}{D_T} \frac{\partial T}{\partial t} = \frac{\partial^2 T}{\partial x^2} \quad (2)$$

for mass and thermal energy transport respectively. The discussion of the properties of Eq. (1) was performed in [8] and Eq. (2) in [9]. In Eq. (1) v_ρ is the velocity of density wave, D_ρ is the diffusion coefficient for mass transfer. In Eq. (2) v_T is the velocity for thermal energy propagation and D_T is the thermal diffusion coefficient.

In the subsequent we will discuss the complex transport phenomena, i.e. diffusion and convection in the external field. The current density in the case

when the diffusion and convection are taken into account can be written as:

$$j = -D_\rho \frac{\partial \rho}{\partial t} - \tau \frac{\partial j}{\partial t} + \rho V. \quad (3)$$

In equation (3) the first term describes the Fourier diffusion, the second term is the Maxwell-Cattaneo term and the third term describes the convection with velocity V . The continuity equation for the transport phenomena has the form:

$$\frac{\partial j}{\partial x} + \frac{\partial \rho}{\partial t} = 0. \quad (4)$$

Considering both equations (3) and (4) one obtains the transport equation:

$$\frac{\partial \rho}{\partial t} = -\tau_\rho \frac{\partial^2 \rho}{\partial t^2} + D_\rho \frac{\partial^2 \rho}{\partial x^2} - V \frac{\partial \rho}{\partial x}. \quad (5)$$

In equation (5) τ_ρ denotes the relaxation time for transport phenomena. Let us perform the Smoluchowski transformation for $\rho(x, t)$

$$\rho = \exp \left[\frac{Vx}{2D} - \frac{V^2 t}{4D} \right] \rho_1(x, t). \quad (6)$$

After substituting $\rho(x, t)$ formula (6) to equation (5) one obtains for $\rho_1(x, t)$:

$$\tau_\rho \frac{\partial^2 \rho_1}{\partial t^2} + \left(1 - \tau_\rho \frac{V_\rho^2}{2D_\rho} \right) \frac{\partial \rho_1}{\partial t} + \tau_\rho \frac{V^4}{16D_\rho^2} \rho_1 = D_\rho \frac{\partial^2 \rho_1}{\partial x^2}. \quad (7)$$

Considering that $D_\rho = \tau_\rho v_\rho^2$ equation (7) can be written as

$$\tau_\rho \frac{\partial^2 \rho_1}{\partial t^2} + \left(1 - \frac{V_\rho^2}{2v_\rho^2} \right) \frac{\partial \rho_1}{\partial t} + \frac{1}{16\tau_\rho} \frac{V^4}{v_\rho^4} \rho_1 = D_\rho \frac{\partial^2 \rho_1}{\partial x^2}. \quad (8)$$

In the same manner equation for the temperature field can be obtained:

$$\tau_T \frac{\partial^2 T_1}{\partial t^2} + \left(1 - \frac{V_T^2}{2v_T^2} \right) \frac{\partial T_1}{\partial t} + \frac{1}{16\tau_T} \frac{V_T^4}{v_T^4} T_1 = D_T \frac{\partial^2 T_1}{\partial x^2}. \quad (9)$$

In equation (9) τ_T , D_T , V_T and v_T are: relaxation time for heat transfer, diffusion coefficient, heat convection velocity and thermal wave velocity.

In this paper we will investigate the structure and solution of the equation (9). For the hyperbolic heat transport Eq. (9) we seek a solution of the form:

$$T_1(x, t) = e^{-\frac{x}{2\tau_T}} u(x, t). \quad (10)$$

After substitution of Eq. (10) into Eq. (9) one obtains:

$$\begin{aligned} \tau_T \frac{\partial^2 u(x, t)}{\partial t^2} &- D_T \frac{\partial^2 u(x, t)}{\partial x^2} + \left(-\frac{1}{4\tau_T} + \frac{V_T^2}{4D_T} + \tau_T \frac{V_T^4}{16D_T^2} \right) u(x, t) \\ &- \tau_T \frac{V_T^2}{2D_T} \frac{\partial u(x, t)}{\partial t} = 0 \end{aligned} \quad (11)$$

Considering that $D_T = \tau_T v_T^2$ Eq. (11) can be written as

$$\tau_T \frac{\partial^2 u}{\partial t^2} - \tau_T v_T^2 \frac{\partial^2 u(x, t)}{\partial x^2} + \left(-\frac{1}{4\tau_T} + \frac{V_T^2}{4\tau_T v_T^2} + \tau_T \frac{V_T^4}{16\tau_T^2 v_T^4} \right) u(x, t) - \frac{V_T^2}{2v_T^2} \frac{\partial u}{\partial t} = 0. \quad (12)$$

After omitting the term $\frac{V_T^4}{v_T^4}$ in comparison to the term $\frac{V_T^2}{v_T^2}$ Eq. (12) takes the form:

$$\frac{\partial^2 u}{\partial t^2} - v_T^2 \frac{\partial^2 u}{\partial x^2} + \frac{1}{4\tau_T^2} \left(-1 + \frac{V_T^2}{v_T^2} \right) u(x, t) - \frac{V_T^2}{2v_T^2 \tau_T} \frac{\partial u}{\partial t} = 0. \quad (13)$$

Considering that $\tau_T^{-2} \gg \tau_T^{-1}$ one obtains from Eq. (13)

$$\frac{\partial^2 u}{\partial t^2} - v_T^2 \frac{\partial^2 u}{\partial x^2} + \frac{1}{4\tau_T^2} \left(-1 + \frac{V_T^2}{v_T^2} \right) u = 0. \quad (14)$$

Equation (14) is the master equation for heat transfer induced by ultra-short laser pulses, i.e. when $\Delta t \approx \tau_T$. In the following we will consider the Eq. (14) in the form:

$$\frac{\partial^2 u}{\partial t^2} - v_T^2 \frac{\partial^2 u}{\partial x^2} - qu = 0 \quad (15)$$

where

$$q = \frac{1}{4\tau_T^2} \left(\frac{V_T^2}{v_T^2} - 1 \right). \quad (16)$$

In equation (16) the ratio

$$M_T = \frac{V_T}{v_T} = \frac{V_T}{v_S} \quad (17)$$

is the Mach number for thermal processes, for $v_T = v_S$ is the sound velocity in the gas of heat carriers [10].

In monograph [10] the structure of equation (15) was investigated. It was shown that for $q < 0$, i.e. $V_T < v_S$, subsonic heat transfer is described by the modified telegrapher equation

$$\frac{1}{v_T^2} \frac{\partial^2 u}{\partial t^2} - \frac{\partial^2 u}{\partial x^2} + \frac{1}{4\tau_T^2 v_T^2} \left(\frac{V_T^2}{v_S^2} - 1 \right) u = 0. \quad (18)$$

For $q > 0$, $v_S < V_T$, i.e. for supersonic case heat transport is described by Klein-Gordon equation:

$$\frac{1}{v_T^2} \frac{\partial^2 u}{\partial t^2} - \frac{\partial^2 u}{\partial x^2} + \frac{1}{4\tau_T^2 v_T^2} \left(\frac{V_T^2}{v_S^2} - 1 \right) u = 0. \quad (19)$$

The velocity of sound v_S depends on the temperature of the heat carriers. The general formula for sound velocity reads [11]:

$$v_S^2 = \left(zG - \frac{G}{z} \left(1 + \frac{5G}{z} - G^2 \right)^{-1} \right)^{-1}. \quad (20)$$

In formula (20) $z = \frac{mc^2}{T}$ and G is of the form [11]:

$$G = \frac{K_3(z)}{K_2(z)}, \quad (21)$$

where c is the light velocity, m is the mass of heat carrier, T is the temperature of the gas and $K_3(z)$, $K_2(z)$ are modified Bessel functions of the second kind. In Fig. 1 the ratio of $\left(\frac{v_s}{c}\right)^2$ was presented as the function of $\frac{T}{mc^2}$. Fig. 1a presents the $\left(\frac{u}{c}\right)^2$ for $\frac{T}{mc^2} < 1$ (nonrelativistic approximations) and Fig. 1b presents the $\left(\frac{u}{c}\right)^2$ for the very high temperature heat carriers gas, i.e. $T > mc^2$ (relativistic gas). It is interesting to observe that for nonrelativistic gas, v_s^2 is a linear function of temperature. From formula (21) can be concluded [11] that for $T < mc^2$ one obtains

$$\left(\frac{v_s}{c}\right)^2 = \left(\frac{5T}{3mc^2}\right) \quad (22)$$

i.e. as for Maxwellian nonrelativistic gas. On the other hand for $T \gg mc^2$, $\left(\frac{v_s}{c}\right)^2 = \frac{1}{3}$ and is independent of T where $v_s^2 = \frac{c^2}{3}$ denotes the sound velocity in the photon gas. In this paper we will study the heat transfer in the relativistic gas, i.e. when $\left(\frac{v_s}{c}\right)^2$ is constant. In that case Eqs. (18) and (19) are the linear hyperbolic equations. In Fig. 1(c) it is shown that Maxwellian approximation is not valid for $\frac{T}{mc^2} > 0.05$ and moreover gives a wrong description of v_s for $\frac{T}{mc^2} = 0.6$, for $v_s > c$ in complete disagreement with special relativity theory. In Fig. 2(a,b,c) the results of calculations of the sound velocity of electron gas and in Fig. 3(a,b,c) for proton gas are presented respectively. For the initial conditions

$$u|_{t=0} = f(x), \quad \left.\frac{\partial u}{\partial t}\right|_{t=0} = F(x).$$

Solutions of the equation can be found in [10]:

$$u(x, t) = \frac{f(x - v_T t) + f(x + v_T t)}{2} + \frac{1}{2} \int_{x - v_T t}^{x + v_T t} \Phi(x, t, z) dz, \quad (23)$$

where

$$\begin{aligned} \Phi(x, t, z) = & \frac{1}{v_T} F(z) J_0 \left(\frac{\sqrt{q}}{v_T} \sqrt{(z - x)^2 - v_T^2 t^2} \right) \\ & + \sqrt{q} t f(z) \frac{J_0' \left(\frac{\sqrt{q}}{v_T} \sqrt{(z - x)^2 - v_T^2 t^2} \right)}{\sqrt{(z - x)^2 - v_T^2 t^2}} \end{aligned}$$

and

$$q = \frac{1}{4\tau_T^2} \left(\frac{V_T^2}{v_T^2} - 1 \right).$$

The general equation for complex heat transfer: diffusion plus convection can be written as:

$$\frac{\partial T}{\partial t} = -\tau_T \frac{\partial^2 T}{\partial t^2} + D_T \frac{\partial^2 T}{\partial x^2} - V_T \frac{\partial T}{\partial x}. \quad (24)$$

Considering Eqs. (6), (10) and (23) the solution of equation (24) is

$$T(x, t) = \exp \left[\frac{V_T x}{2D} - \frac{V_T^2 t}{4D} \right] e^{-\frac{2}{2\tau_T}} \cdot \left(\frac{f(x - v_T t) + f(x + v_T t)}{2} + \frac{1}{2} \int_{x-v_T t}^{x+v_T t} \Phi(x, t, z) dz \right).$$

In Fig. 4 the comparison of the calculation of sound velocity for electron gas and the electron spectra [7] is presented. The change of the shape of the electron spectra in vicinity of 5 MeV can be easily seen. At the total energy of the 5 MeV the sound velocity in electron plasma is constant and independent of electron energy. Electrons with velocities greater than $\frac{1}{\sqrt{3}}c$ can generate the shock thermal waves which heats the plasma to higher temperature.

3 Conclusions

In paper the Heaviside equation for laser heating electron plasma was formulated and solved. It was shown that for high energy electrons, with energy > 5 MeV the sound velocity in plasma is constant and equal $v_S = \frac{1}{\sqrt{3}}c$. The superheating of plasma with electron energy > 5 MeV can be achieved by the generation of thermal shock waves.

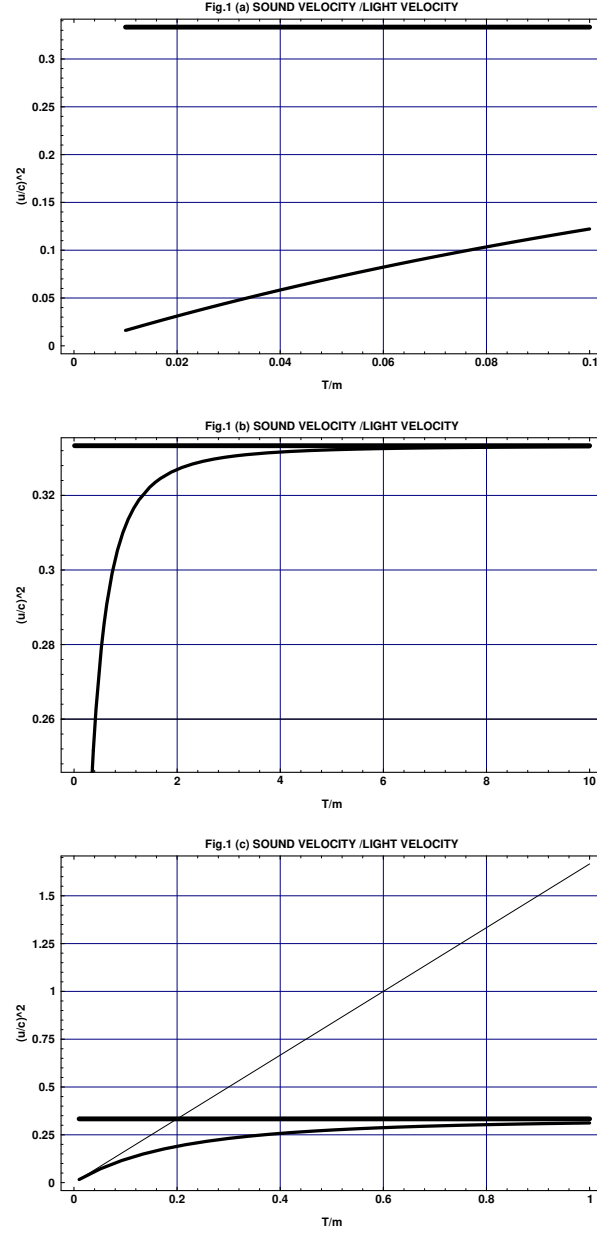


Figure 1: (a) The ratio: sound velocity/light velocity $(\frac{u}{c})^2$ as the function $\frac{T}{m}$ for cold heat carriers ($\frac{T}{m} \ll 1$) ; (b) for hot heat carriers ($\frac{T}{m} \gg 1$) ; (c) Comparison of the ratio $(\frac{u}{c})^2$ for hot carriers (—), ultra-relativistic carriers (—) and Maxwellian approximation (—)

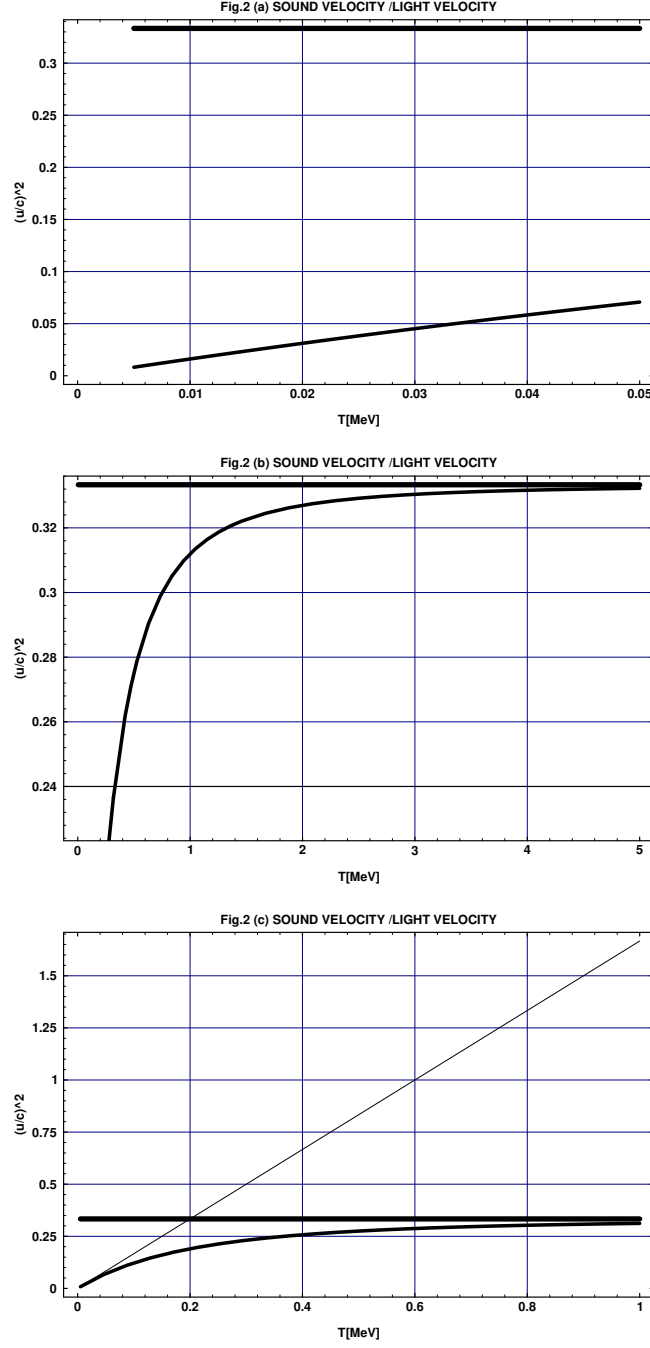


Figure 2: The same as in Fig. 1, but for electrons with mass $m=0.51 \text{ MeV}/c^2$

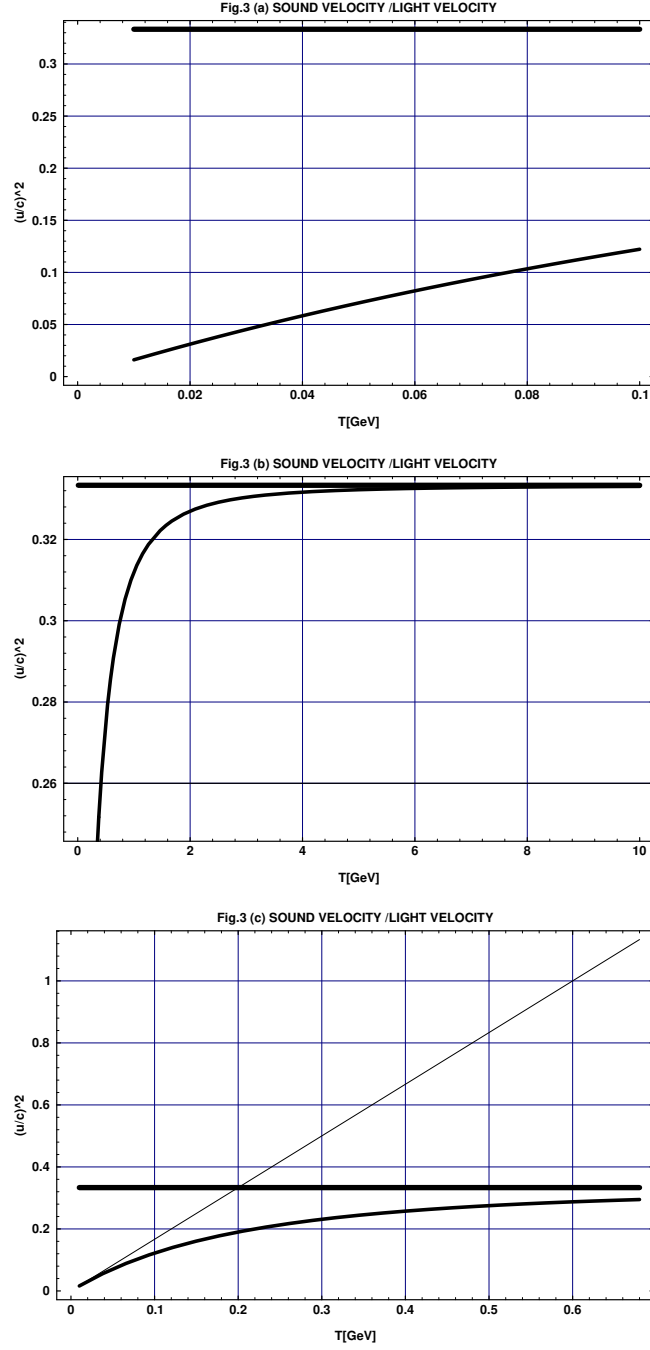


Figure 3: The same as in Fig. 2 but for protons with mass $m=0.98$ GeV

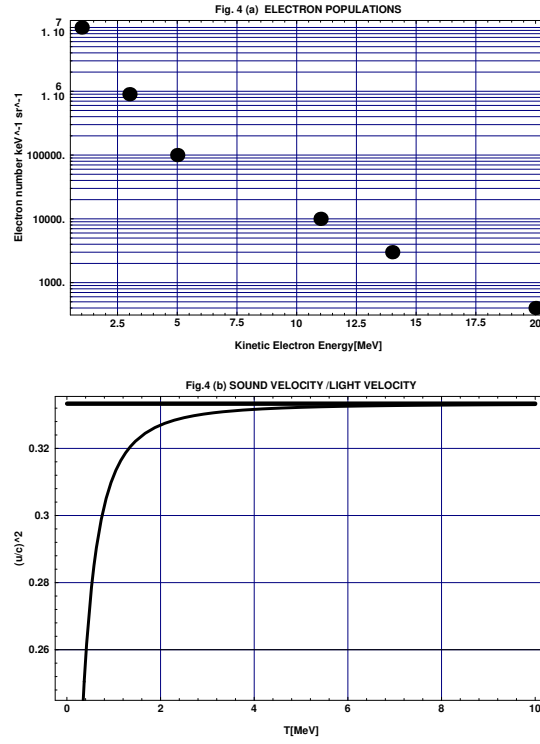


Figure 4: (a) The experimental data [7] for the electron populations. Circles = data. The interaction beam intensity is $I_{\max} \approx 6 \cdot 10^{18} \text{ W/cm}^2$. (b) The ratio $\frac{u}{c}$ as the function of the electron temperature T [MeV]

References

- [1] N. Blanchot et al., *Opt. Lett.*, **20**, (1995) p. 395.
- [2] M. Tabak et al., *Phys. Plasmas*, **1**, (1994), p. 1626.
- [3] P. Monot et al., *Phys. Rev. Lett.*, **74**, (1995) p. 2953.
- [4] M. Borghesi et al., *Phys. Rev. Lett.* **78**, (1997), p. 879.
- [5] A. Borisov et al., *Plasma Phys. Controlled Fusion*, **37**, (1995), p. 569.
- [6] G. Malka et al., *Phys. Rev. Lett.*, **78**, (1997), p. 3314.
- [7] G. Malka et al., *Phys. Rev. Lett.* **79**, (1997), p. 2053.
- [8] J. Marciak-Kozłowska, M. Kozłowski, *Lasers in Engineering*, **12**, (2002), p. 17.
- [9] J. Marciak-Kozłowska, M. Kozłowski, *Lasers in Engineering*, (2003, to be published).
- [10] M. Kozłowski, J. Marciak-Kozłowska, *From Quarks to Bulk Matter*, Hadronic Press, 2001, USA.
- [11] J. L. Synge, *The Relativistic Gas*, North-Holland Publisher Company, 1957.