

LCAO model for 3D Fermi surface of high- T_c cuprate $\text{Ti}_2\text{Ba}_2\text{CuO}_{6+\delta}$

M. Stoev* and T.M. Mishonov†
*Department of Theoretical Physics, Faculty of Physics,
 University of Sofia St. Kliment Ohridski,
 5 J. Bourchier Boulevard, BG-1164 Sofia, Bulgaria*
 (Dated: November 9, 2018)

A simple analytical formula for three-dimensional Fermi surface (3D FS) of $\text{Ti}_2\text{Ba}_2\text{CuO}_{6+\delta}$ is derived in the framework of LCAO approximation spanned over Cu 4s, Cu $3d_{x^2-y^2}$, O $2p_x$ and O $2p_y$ states. This analytical result can be used for fitting of experimental data for 3D FS such as polar angle magnetoresistance oscillation. The model takes into account effective copper-copper hopping amplitude t_{ss} between Cu 4s orbitals from neighbouring CuO_2 layers. The acceptable correspondence with the experimental data gives a hint that the t_{ss} amplitude dominates in formation of coherent 3D FS, and other oxygen-oxygen and copper-oxygen amplitudes are rather negligible. For absolute determination of the hopping parameters a simple electronic experiment with a field effect transistor type microstructure is suggested. The thin superconductor layer is the source-drain channel of the layered structure where an AC current is applied.

PACS numbers: 71.15.Ap, 73.43.Qt, 74.72.Jt, 74.78.Fk

I. INTRODUCTION AND NOTATIONS

For a long time magnetic oscillations are a standard method for determination of Fermi surface. For a comprehensive introduction see for example the monograph by Shoenberg¹. A recent observation of three-dimensional Fermi surface (3D FS) in $\text{Ti}_2\text{Ba}_2\text{CuO}_{6+\delta}$ ($\text{Ti}:2201$)² unambiguously has shown that charge carriers in this material are ordinary Fermi particles. This observation has an important significance for the physics of high- T_c cuprates in general. There is almost a consensus that pairing mechanism is common for all cuprates wherever it is hidden. That is why the observation of 3D FS leads to the conclusion that this mechanism should be able to work even for Fermi quasiparticles in BCS scenario. An important first step in this scenario is the analysis of the electron spectrum of a metal in a self-consistent approximation of independent electrons. For the cuprates, as for many other ion materials, the method of linear combination of atomic orbital (LCAO) gives adequate description of the band structure. Tight binding band structure is also a relevant starting point for theoretical analysis of many phenomena related to quasiparticle interaction. For example Abrikosov³ used tight binding σ -model to build the spin density theory of metal-insulator transition in cuprates. A lot of phenomena in cuprate physics especially for overdoped cuprates can be understood in the framework of orthodox fermiology. The purpose of the present work is to derive analytical LCAO formula for 3D FS and the band structure of $\text{Ti}:2201$ which can be used for further analysis of the experimental data; for local density approximation (LDA) calculations of band structure of this material see, for example, reference⁴. These analytical results can be used for fitting the angle magnetoresistance oscillation (AMRO) data and at the same time they represent a realistic noninteracting part of the lattice Hamiltonian for

further consideration of pairing in cuprates.

Hilbert space in LCAO approximation is spanned over the relevant Cu $3d_{x^2-y^2}$, Cu 4s, O $2p_x$ and O $2p_y$ orbitals. The generic 4-band σ -model for CuO_2 plane was suggested by Labbé and Bok⁵. Later on detailed *ab initio* calculations of band structure of layered cuprates by Andersen *et al.*⁶ confirmed that this generic model adequately interpolates the LDA band structure and the influence of π -orbitals for the conduction band is negligible. In $\text{Ti}:2201$ the neighbouring CuO_2 planes are shifted in a half period. In an elementary cell indexed by three integer numbers $\mathbf{R}_n = \mathbf{a}_1 n_1 + \mathbf{a}_2 n_2 + \mathbf{a}_3 n_3$, where $\mathbf{a}_1 = a_0 \mathbf{e}_x$, $\mathbf{a}_2 = a_0 \mathbf{e}_y$ and $\mathbf{a}_3 = b_0 \mathbf{e}_z + \frac{1}{2} a_0 (\mathbf{e}_x + \mathbf{e}_y)$, the space vector of copper ions is $\mathbf{R}_{\text{Cu}} = \mathbf{0}$, and for oxygen ions we have $\mathbf{R}_{\text{O}_a} = \frac{1}{2} a_0 \mathbf{e}_x$ and $\mathbf{R}_{\text{O}_b} = \frac{1}{2} a_0 \mathbf{e}_y$; \mathbf{e}_x , \mathbf{e}_y and \mathbf{e}_z are the unit vectors. For the introduced notations the LCAO wave function reads as

$$\begin{aligned} \psi_{\text{LCAO}}(\mathbf{r}) = \sum_{\mathbf{n}} [& D_{\mathbf{n}} \psi_{\text{Cu}3d}(\mathbf{r} - \mathbf{R}_n - \mathbf{R}_{\text{Cu}}) \\ & + S_{\mathbf{n}} \psi_{\text{Cu}4s}(\mathbf{r} - \mathbf{R}_n - \mathbf{R}_{\text{Cu}}) + X_{\mathbf{n}} \psi_{\text{O}_a 2p_x}(\mathbf{r} - \mathbf{R}_n - \mathbf{R}_{\text{O}_a}) \\ & + Y_{\mathbf{n}} \psi_{\text{O}_b 2p_y}(\mathbf{r} - \mathbf{R}_n - \mathbf{R}_{\text{O}_b})], \end{aligned} \quad (1)$$

where $\Psi_{\mathbf{n}} = (D_{\mathbf{n}}, S_{\mathbf{n}}, X_{\mathbf{n}}, Y_{\mathbf{n}})$ is the tight-binding wave function in lattice representation⁷. In second quantisation approach the complex amplitudes $D_{\mathbf{n}}$, $S_{\mathbf{n}}$, $X_{\mathbf{n}}$ and $Y_{\mathbf{n}}$ become Fermi annihilation operators.

The LCAO wave function can be expressed by Fermi operators in momentum space

$$\Psi_{\mathbf{n}} = \begin{pmatrix} D_{\mathbf{n}} \\ S_{\mathbf{n}} \\ X_{\mathbf{n}} \\ Y_{\mathbf{n}} \end{pmatrix} = \frac{1}{\sqrt{\mathcal{N}}} \sum_{\mathbf{k}} e^{i\mathbf{k} \cdot \mathbf{R}_n} \begin{pmatrix} D_p \\ S_p \\ -ie^{\mathbf{k} \cdot \mathbf{R}_{\text{O}_a}} X_p \\ -ie^{\mathbf{k} \cdot \mathbf{R}_{\text{O}_b}} Y_p \end{pmatrix}, \quad (2)$$

where \mathcal{N} is the number of unit cells supposing periodic boundary condition, $\mathbf{k} = (p_x/a_0, p_y/a_0, p_z/b_0)$ is

the electron quasimomentum and \mathbf{p} is the dimensionless quasimomentum in first Brillouin zone $(p_x, p_y, p_z) \in (-\pi, \pi)$. This equation describes the Fourier transformation between the coordinate representation $\Psi_{\mathbf{n}} = (D_{\mathbf{n}}, S_{\mathbf{n}}, X_{\mathbf{n}}, Y_{\mathbf{n}})$ and the momentum representations $\psi_p = (D_p, S_p, X_p, Y_p)$ of the tight-binding wave function.

In order to derive the electron band Hamiltonian in momentum representation, we have to analyze the LCAO Schrödinger equation $\epsilon\psi_i = \epsilon_i\psi_i - \sum_j (\pm)t_{ij}\psi_j$ for a plane wave $\Psi_{\mathbf{n}} \propto e^{i\mathbf{k}\cdot\mathbf{R}_{\mathbf{n}}}$, where ψ_i are amplitudes multiplying atomic orbitals, ϵ is the electron energy, ϵ_i are single site energies, the sum is spanned to the nearest and next nearest neighbouring atoms at i-orbital and hopping amplitudes have +sign for bonding, and -sign for antibonding orbitals with different signs of atomic wave functions⁸. For a detailed analysis, notations and references see⁷. Here we will give a brief description. Let $\epsilon(\mathbf{p})$ be the electron band dispersion; ϵ_d is the single-site energies for Cu 3d level, t_{pd} is the hopping amplitude between the O 2p states and Cu 3d. Considering only nearest-neighbour hoppings and omitting the common $e^{i\mathbf{k}\cdot\mathbf{R}_{\mathbf{n}}}$ multiplier for the Cu 3d_{x²-y²} amplitude in $\mathbf{R}_{\mathbf{n}}$ elementary cell we obtain

$$\begin{aligned} \epsilon(\mathbf{p})D_p &= \epsilon_d D_p - it_{pd}(e^{i\frac{p_x}{2}} X_p - e^{i\frac{p_x}{2}} e^{-ip_x} X_p - e^{i\frac{p_y}{2}} Y_p + \\ &e^{i\frac{p_y}{2}} e^{-ip_y} Y_p) = \epsilon_d D_p + 2t_{pd}(\sin \frac{p_x}{2} X_p - \sin \frac{p_y}{2} Y_p) = \\ &= \epsilon_d D_p + t_{pd}s_x X_p - t_{pd}s_y Y_p. \end{aligned} \quad (3)$$

Analogous consideration can be applied for Cu 4s amplitude: ϵ_s is the single site energy for Cu 4s state, t_{sp} is the hopping amplitude between O 2p and Cu 4s; t_{sp} is bigger than t_{pd} because Cu 3d_{x²-y²} orbitals are much more localized near to copper nucleus. Due to the symmetry of the Cu 4s wave function, now the relative signs between X_p and Y_p are equal

$$\begin{aligned} \epsilon(\mathbf{p})S_p &= \epsilon_s S_p + t_{sp}s_x X_p + t_{sp}s_y Y_p \\ &+ it_{ss}(e^{i\frac{p_x}{2}} e^{i\frac{p_y}{2}} e^{ip_z} + e^{i\frac{p_x}{2}} e^{i\frac{p_y}{2}} e^{-ip_z} + e^{-i\frac{p_x}{2}} e^{i\frac{p_y}{2}} e^{ip_z} \\ &+ e^{-i\frac{p_x}{2}} e^{i\frac{p_y}{2}} e^{-ip_z} + e^{-i\frac{p_x}{2}} e^{-i\frac{p_y}{2}} e^{ip_z} + e^{-i\frac{p_x}{2}} e^{-i\frac{p_y}{2}} e^{-ip_z} \\ &+ e^{i\frac{p_x}{2}} e^{-i\frac{p_y}{2}} e^{ip_z} + e^{i\frac{p_x}{2}} e^{-i\frac{p_y}{2}} e^{-ip_z})S_p = \\ &= \epsilon_s S_p + t_{sp}s_x X_p + t_{sp}s_y Y_p - t_{ss}zS_p, \end{aligned} \quad (4)$$

where $z(\mathbf{p}) = c_x c_y c_z$. The influence of three dimensionality (3D) is taken into account only here by the effective Cu 4s-Cu 4s transfer integral t_{ss} between copper ions from different CuO₂ planes. Following⁶ we have used the standard notations:

$$\begin{aligned} s_x &= 2 \sin(p_x/2), \quad s_y = 2 \sin(p_y/2), \\ c_x &= 2 \cos(p_x/2), \quad c_y = 2 \cos(p_y/2), \\ x &= \sin^2(p_x/2), \quad y = \sin^2(p_y/2), \end{aligned} \quad (5)$$

adding $c_z = 2 \cos p_z$. In first Brillouin zone for $p_x, p_y \in (-\pi, \pi)$ the variables $c_x, c_y \geq 0$, however in the whole momentum space in the interval $(0, 2\pi)$, for example, we have to redefine $c_x = 2|\cos(p_x/2)|$ and $c_y = 2|\cos(p_y/2)|$.

Analogously considering electron hopping to O 2p_x orbital and dividing by $-ie^{i\frac{p_x}{2}}$ we have

$$\begin{aligned} \epsilon(\mathbf{p})X_p &= \epsilon_p X_p + t_{pd}s_x D_p + t_{sp}s_x S_p + \\ &+ t_{pp}(-i)(e^{-i\frac{p_x}{2}} e^{-i\frac{p_y}{2}} e^{-i\frac{p_x}{2}} e^{i\frac{p_y}{2}} + e^{i\frac{p_x}{2}} e^{i\frac{p_y}{2}} - e^{i\frac{p_x}{2}} e^{-i\frac{p_y}{2}})Y_p \\ &= \epsilon_p X_p + t_{pd}s_x D_p + t_{sp}s_x S_p - t_{pp}s_x s_y Y_p, \end{aligned} \quad (6)$$

where ϵ_p is O 2p single-site energy, t_{pp} is the hopping amplitude between adjacent O 2p_x and O 2p_y orbitals. Due to the crystal symmetry the equation for Y_p can be obtained by exchange between x and y, and X and Y; only the relative sign between O 2p and Cu 3d orbitals has to be changed.

Finally the LCAO Schrödinger equation in momentum representation reads as

$$(H_p - \epsilon(\mathbf{p})\mathbb{1})\psi_p = 0, \quad (7)$$

where

$$H_p - \epsilon(\mathbf{p})\mathbb{1} = \begin{pmatrix} -\epsilon_d & 0 & t_{pd}s_x & -t_{pd}s_y \\ 0 & -\epsilon_s - t_{ss}z & t_{sp}s_x & t_{sp}s_y \\ t_{pd}s_x & t_{sp}s_x & -\epsilon_p & -t_{pp}s_x s_y \\ -t_{pd}s_y & t_{sp}s_y & -t_{pp}s_x s_y & -\epsilon_p \end{pmatrix}, \quad (8)$$

and $\psi_p = (D_p, S_p, X_p, Y_p)$ is the wave function in momentum space.

After some algebra the secular equation takes the form

$$\begin{aligned} D(\mathbf{p}) &= \det(H_p - \epsilon(\mathbf{p})\mathbb{1}) = \mathcal{A}xy + \mathcal{B}(x + y) + \mathcal{C} \\ &+ z[\mathcal{K}xy + \mathcal{L}(x + y) + \mathcal{M}] = 0 \end{aligned} \quad (9)$$

with energy-dependent coefficients

$$\begin{aligned} \mathcal{A}(\epsilon) &= 16(4t_{pd}^2 t_{sp}^2 + 2t_{sp}^2 t_{pp}\epsilon_d - 2t_{pd}^2 t_{pp}\epsilon_s - t_{pp}^2 \epsilon_d \epsilon_s), \\ \mathcal{B}(\epsilon) &= -4\epsilon_p(t_{sp}^2 \epsilon_d + t_{pd}^2 \epsilon_s), \quad \mathcal{C}(\epsilon) = \epsilon_d \epsilon_p^2 \epsilon_s, \\ \mathcal{K}(\epsilon) &= -t_{ss}t_{pp}(\epsilon_d t_{pp} + 2t_{pd}^2), \quad \mathcal{L}(\epsilon) = -\epsilon_p t_{ss} t_{pd}^2, \\ \mathcal{M}(\epsilon) &= \epsilon_d \epsilon_p^2 t_{ss}, \end{aligned} \quad (10)$$

where $\epsilon_s = \epsilon(\mathbf{p}) - \epsilon_s$, $\epsilon_p = \epsilon(\mathbf{p}) - \epsilon_p$, $\epsilon_d = \epsilon(\mathbf{p}) - \epsilon_d$, are the energies taken into account from single site atomic levels. Due to the small numerical value of t_{ss} the modulation of FS in p_z direction is also small.

II. ANALYSIS OF THE INFLUENCE OF THE INTERLAYER HOPPING AMPLITUDE t_{ss}

Comparing our secular determinant with the purely 2D case $t_{ss} = 0$, in (9) one can see that the influence of

interlayer hopping is formally reduced to a momentum dependent single site energy shift for the Cu 4s level

$$\epsilon_s \rightarrow \epsilon_s - t_{ss}z(\mathbf{p}). \quad (11)$$

This is a diagonal matrix element whose influence is just zero on the $p_y = \pi$ and $p_x = \pi$ lines in 2D Brillouin zone, shown in figure 1, which we will discuss later. On the diagonal, where $p_x = p_y$ and $p_y = 2\pi - p_x$, the influence of this term is also negligible. The 2D Hamiltonian (for $t_{ss} = 0$) has such eigenfunctions¹¹:

$$\psi_p = \begin{pmatrix} D_p \\ S_p \\ X_p \\ Y_p \end{pmatrix} = \begin{pmatrix} -\epsilon_s \epsilon_p^2 + 4\epsilon_p t_{sp}^2 (x+y) - 32t_{pp} \tau_{sp}^2 xy \\ -4\epsilon_p t_{sp} t_{pd} (x-y) \\ -(\epsilon_s \epsilon_p - 8\tau_{sp}^2 y) t_{pd} s_x \\ (\epsilon_s \epsilon_p - 8\tau_{sp}^2 x) t_{pd} s_y \end{pmatrix}, \quad (12)$$

where $\tau_{sp}^2 = t_{sp}^2 - \frac{1}{2}\epsilon_s t_{pp}$. After the calculation of ψ_p for $\epsilon = \epsilon^{(2D)}(\mathbf{p})$ we have to make the normalization $\psi_p := \psi_p / \sqrt{D_p^2 + S_p^2 + X_p^2 + Y_p^2}$. In first perturbational approximation the influence of the diagonal term (11) gives an addition to the band energy $\epsilon(\mathbf{p})$

$$W(\mathbf{p}) = -8t_{ss} \cos\left(\frac{p_x}{2}\right) \cos\left(\frac{p_y}{2}\right) \cos(p_z) S_p^2, \quad (13)$$

$$\varepsilon(\mathbf{p}) = \varepsilon^{(2D)}(\mathbf{p}) + W(\mathbf{p}),$$

i.e we present the band energy as a sum of a 2D band energy and a correction by taking into account the hybridization in c-direction $W(\mathbf{p})$. Since $S_p \propto (x-y)$ this correction reduces to zero on the diagonals of Brillouin zone and in such a way the influence of t_{ss} vanishes at 8 points of 2D Fermi contour at every 45 degrees at horizontal, vertical and diagonal lines crossing (π, π) point. For the overdoped Tl:2201 the hole pocket centered at (π, π) point takes 62% of the Brillouin zone, see figure 1.

In initial approximation $t_{ss} = 0$ we have a 2D secular equation

$$\det(H_p - \epsilon^{(2D)}(\mathbf{p})\mathbf{1}) = \mathcal{A}xy + \mathcal{B}(x+y) + \mathcal{C}, \quad (14)$$

which gives explicit expressions for the lower and upper arch of constant energy contour (CEC)¹⁰

$$p_y^{(low)}(p_x) = 2 \arcsin \sqrt{-\frac{\mathcal{B}x + \mathcal{C}}{\mathcal{A}x + \mathcal{B}}}, \quad (15)$$

$$p_y^{(up)}(p_x) = 2\pi - p_y(p_x).$$

For the band velocity at energy equal to Fermi energy $\varepsilon^{(2D)}(\mathbf{p}) = E_F$

$$\mathbf{v} = \frac{\partial \varepsilon^{(2D)}(\mathbf{p})}{\partial \mathbf{p}}, \quad v_F = \sqrt{v_x^2 + v_y^2}, \quad (16)$$

we also have simple explicit expressions¹⁰

$$v_x = -\frac{1}{2} \frac{(\mathcal{A}y + \mathcal{B}) \sin(p_x)}{\mathcal{A}'xy + \mathcal{B}'(x+y) + \mathcal{C}'}, \quad (17)$$

$$v_y = -\frac{1}{2} \frac{(\mathcal{A}x + \mathcal{B}) \sin(p_y)}{\mathcal{A}'xy + \mathcal{B}'(x+y) + \mathcal{C}'},$$

$$v_F = \left| \frac{\partial \varepsilon^{(2D)}(\mathbf{p})}{\partial \mathbf{p}} \right| \quad (18)$$

$$= \frac{[(\mathcal{A}y + \mathcal{B})^2 x(1-x) + (\mathcal{A}x + \mathcal{B})^2 y(1-y)]^{1/2}}{|\mathcal{A}'xy + \mathcal{B}'(x+y) + \mathcal{C}'|};$$

the velocity in m/s is actually $a_0 \mathbf{v} / \hbar$. The coefficients in the denominator \mathcal{A}' , \mathcal{B}' and \mathcal{C}' are energy derivatives of the polynomials (10),

$$\mathcal{A}'(\epsilon) = 16 \left[2t_{sp}^2 t_{pp} - 2t_{pd}^2 t_{pp} - t_{pp}^2 (\epsilon_d + \epsilon_s) \right] = d\mathcal{A}/d\epsilon,$$

$$\mathcal{B}'(\epsilon) = -4(t_{sp}^2 \epsilon_d + t_{pd}^2 \epsilon_s) - 4\epsilon_p (t_{sp}^2 + t_{pd}^2) = d\mathcal{B}/d\epsilon,$$

$$\mathcal{C}'(\epsilon) = \epsilon_s \epsilon_p^2 + \epsilon_d \epsilon_p^2 + 2\epsilon_d \epsilon_s \epsilon_p = d\mathcal{C}/d\epsilon. \quad (19)$$

Our problem is to take into account the influence of the perturbation (13) to the Fermi contour (15). Under the influence of the perturbation $W(\mathbf{p})$ every point \mathbf{p} of this CEC is shifted in a perpendicular to CEC direction with momentum shift

$$\Delta \mathbf{p} = -W(\mathbf{p}) \frac{\mathbf{v}}{v_F^2}, \quad v_F = \frac{|W(\mathbf{p})|}{|\Delta \mathbf{p}|}, \quad (20)$$

$$\varepsilon(\mathbf{p}) = \varepsilon^{(2D)}(\mathbf{p}) + \mathbf{v} \cdot \Delta \mathbf{p}.$$

The coordinates of the perturbed CEC are $p_x + \Delta p_x$ and $p_y + \Delta p_y$; in such a way we approximatively built the 3D Fermi surface. The formulae above represent a self-explainable derivation: (1) the band energy is approximatively presented by gradient expansion (2) the ratio of energy difference and momentum difference is equal to Fermi velocity (3) the shift of Fermi contour in momentum space is parallel to the Fermi velocity. Projections of this Fermi surfaces in 2D Brillouin zone are depicted in figure 1. The LCAO approximation gives a similar shape of the Fermi contours as the experimental Fermi surface². We have taken the set of parameters from⁶: $\epsilon_s = 6.5$ eV, $\epsilon_d = 0$ eV, $\epsilon_p = -0.9$ eV, $t_{pd} = 1.6$ eV, $t_{pp} = 0$ eV, $t_{sp} = 2.3$ eV. The Fermi level $E_F = 1.89$ eV is determined to give $f = 62\%$ hole filling

² of the 2D Brillouin zone

$$\frac{8}{(2\pi)^2} \int_{p_d}^{\pi} (p_x - p_y(p_x; E_F)) dp_x = f, \quad (21)$$

where p_d is the solution of the equation $0 < p_y(p_d; E_F) = p_d < \pi$

$$x_d = \sin^2 \left(\frac{p_d}{2} \right) = \frac{1}{\mathcal{A}} \left(-\mathcal{B} + \sqrt{\mathcal{B}^2 - \mathcal{A}\mathcal{C}} \right). \quad (22)$$

The Fermi contour passes through the points $D = (p_d, p_d)$ and $C = (p_c, \pi)$, where

$$x_c = \sin^2 \left(\frac{p_c}{2} \right) = -\frac{\mathcal{B} + \mathcal{C}}{\mathcal{A} + \mathcal{B}}, \quad (23)$$

or $p_c = p_y(\pi; E_F)$. Finally interlayer hopping amplitude $t_{ss} = 140$ meV is determined by the comparison with the experiment of the modulation of FS².

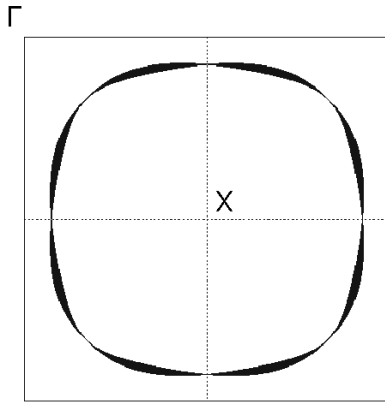


FIG. 1: Projections of 3D FS in 2D Brillouin zone obtained by equation (20). In agreement with AMRO data² the small modulation due to Cu 4s-Cu 4s tunnelling amplitude t_{ss} vanishes at 8 highly symmetric lines passing through (π, π) point. The hole pocket centered at (π, π) point has approximately 62% of the surface of the 2D Brillouin zone. The warping is not to scale, it is exaggerated after² in order to emphasise its angular dependence which can be explained in the framework of the LCAO method.

III. COMPARISON WITH ARPES DATA

The galvanomagnetic phenomena such as AMRO are sensitive mainly to the total area of the sections of the Fermi surface. The angle resolved photoemission spectra (ARPES) however are sensitive to the shape of the quasi 2D Fermi surface¹². In order to make a compromise conserving the area of the Fermi surface, actually on the cross-section at $p_z = 0$, we can try to fit its shape. The Fermi contour extracted from ARPES data for Tl:2201¹³ we can use the diagonal point $\mathcal{D} = (0.3576 \pi/a_0, 0.3576 \pi/a_0)$ and another point $\mathcal{C} = (0.1256 \pi/a_0, \pi/a_0)$ as reference points. We can start from the set of LCAO parameters given in reference⁶ and changing only the Fermi level E_F and Cu 4s level ϵ_s we can pass the Fermi contour through the reference points \mathcal{C} and \mathcal{D} as it is done in figure 2. The Fermi contour reproduces the shape from reference¹³, its area is in agreement with the AMRO data², and even the E_F and ϵ_s are not very different from the fit of LDA calculations by Andersen *et al.*⁶.

The fit of the absolute value of the energy scale however requires a big compromise. As it is well-known the LDA often gives overbinding of order 2 or even 3. Correcting overbinding in local-density-approximation calculations we can insert an energy renormalization scale so that the shape of the Fermi surface to be exactly conserved and only the energy width along some well investigated cut to coincide with the experiment. We used the cut-III from reference¹³ to fix the energy scale. This cut is given as a short segment in figure 2. In figure 3 this cut, energy versus quasimomentum, is given as leftmost segment. The circles through which the dispersion line passes are reference points chosen from the experimental data¹³. These

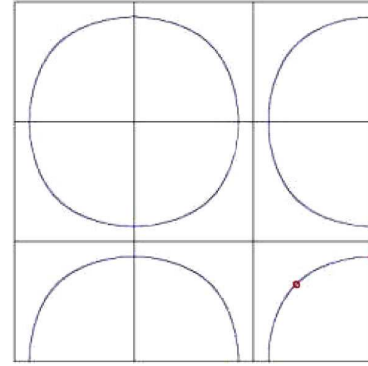


FIG. 2: A two dimensional section of Fermi surface for $p_z = 0$. The theoretical Fermi contour is passing through the reference points in k -space: $\mathcal{C} = (0.1256 \pi/a_0, \pi/a_0)$ and $\mathcal{D} = (0.3576 \pi/a_0, 0.3576 \pi/a_0)$ marked with small (red) circles. The short segment close to the saddle point $(\pi/a_0, 0/a_0)$ is the cut-III from Ref.¹³ analyzed further at figure 3.

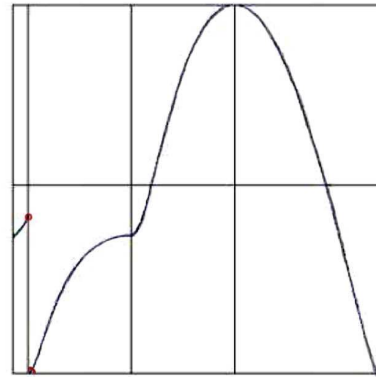


FIG. 3: Energy (in arbitrary units) as function of momentum along the cut-III¹³ presented in quasimomentum space in figure 2. The two (red in the color version) circles are reference points determining the vertical shift of the dispersion curve and the renormalization of all LDA energy parameters. For comparison are presented standard theoretical cuts $\varepsilon(\mathbf{p})$ for the triangle: $(0,0)-(\pi,0)-(\pi,\pi)-(0,0)$.

reference points determine the energy scale.

On the right of this reference segment is presented the standard energy dispersion along highly symmetric directions $(0,0)-(\pi,0)-(\pi,\pi)-(0,0)$ in momentum space. One of the reference points was shifted in vertical direction in order to use only the energy width of the cut-III for energy determination. We believe that the so determined band structure has predictive capabilities in a sense that we can use analytical formulae for the band structure together with the fitted values of the LCAO parameters in order to predict the results of new ARPES measurements. In short, the mission of the theoretical physics is to predict the results of experiments not done by nobody before. As a further perspective we believe that single site energies have to be taken from the experimental data processing of spectroscopic data for interband

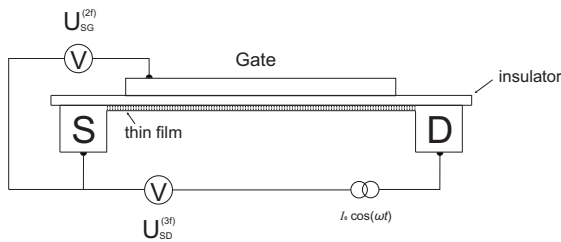


FIG. 4: A field effect transistor(FET) is schematically illustrated. The current $I(t)$, applied between the source (S) and the drain (D) has a frequency ω . Running through the transistor the electrons create voltage U_{SG} with double frequency 2ω between the source (S) and the gate (G). The source-drain voltage U_{SD} is measured on the triple frequency 3ω .

transitions. Of course such an interpretation suppose active use of the generic 4-band model taking into account the accessories for every cuprate. Every additional experiment for absolute determination of the energy scale can be an indispensable tool for the final determination of the energy scale of LCAO parameters. In the next section we propose a simple electronic measurement which should be done with a layered metal-insulator-superconductor structure with the same superconductor.

IV. DETERMINATION OF LOGARITHMIC DERIVATIVE OF DENSITY OF STATES BY ELECTRONIC MEASUREMENTS

The analysis of Fermi surface by AMRO and ARPES as a rule leads only to the determination of relative values of the parameters of the LCAO Hamiltonian. In order to extract the absolute values we need to fit band widths, cyclotron frequencies, density of states $\nu(E_F)$ at Fermi energy E_F or other quantities having dimension of energy. We consider as very important the comparison of different methods for investigations of band structure. The AMRO gives the exact value of the area of sections of Fermi surface, the ARPES is more sensitive for the shape and will be nice if this knowledge is completed by some other method giving the exact value of some energy parameter.

The purpose of this section is to suggest a simple electronic experiment, determining the logarithmic derivative of the density of states (DOS) by electronic measurements using a thin film of the investigated material Tl:2201. The proposed experiment requires the preparation of field-effect transistor (FET) type microstructure and requires standard electronic measurements. The FET controls the current between two points but does so differently than the bipolar transistor. The FET relies on an electric field to control the shape and hence the conductivity of a "channel" in a semiconductor material. The shape of the conducting channel in a FET is altered when a potential difference is applied to the gate terminal (potential relative to either source or drain). It causes

the electrons flow to change it's width and thus controls the voltage between the source and the drain. If the negative voltage applied to the gate is high enough, it can remove all the electrons from the gate and thus close the conductive channel in which the electrons flow. Thus the FET is blocked.

The system, considered in this work is in hydrodynamic regime, which means low frequency regime where the temperature of the superconducting film adiabatically follows the dissipated Ohmic power. All working frequencies of the lock-ins, say up to 100 kHz, are actually low enough. The investigations of superconducting bolometers show that only in the MHz range it is necessary to take into account the heat capacity of the superconducting film. As an example there is a publication corresponding to this topic²³, as well as the references therein. In this work we propose an experiment with a FET, for which we need to measure the second harmonic of the source-gate voltage and the third harmonic of the source-drain voltage. Other higher harmonics will be present in the measurements (e.g. from the leads), but in principle they can be also used for determination of the density of states. An analogous experimental research has been already performed for investigation of thermal interface resistance.²⁴ The suggested experiment can be done using practically the same experimental setup, only the gate electrodes should be added to the protected by insulator layer superconducting films.

The purpose of this section is to suggest a simple electronic experiment, determining the logarithmic derivative of the density of states by electronic measurements using a thin film of the material Tl:2201. The thickness of the samples should be typical for the investigation of high-Tc films, say 50-200 nm. Such films demonstrate already the properties of the bulk phase. The numerical value of this parameter

$$\nu'(E_F) = \frac{d\nu(\epsilon)}{d\epsilon}, \quad (24)$$

will ensure the absolute determination of the hopping integrals.

We propose a field effect transistor (FET) from Tl:2201 Fig. 4 to be investigated electronically with a lock-in at second and third harmonics. Imagine a strip of Tl:2201 and between the ends of the strip, between the source (S) and the drain (D) an AC current is applied

$$I_{SD}(t) = I_0 \cos(\omega t). \quad (25)$$

For low enough frequencies the ohmic power P increases the temperature of the film T above the ambient temperature T_0

$$P = RI_{SD}^2 = \alpha(T - T_0), \quad (26)$$

where the constant α determines the boundary thermo-resistance between the Tl:2201 film and the substrate, and $R(T)$ is the temperature dependent source-drain (SD) resistance. We suppose that for a thin film the

temperature is almost homogeneous across the thickness of the film. In such a way we obtain for the temperature oscillations

$$(T - T_0) = \frac{RI_{SD}^2}{\alpha} = \frac{RI_0^2}{\alpha} \cos^2(\omega t). \quad (27)$$

As the resistance is weakly temperature dependent

$$R(T) = R_0 + (T - T_0)R_0', \quad R_0'(T_0) = \left. \frac{dR(T)}{dT} \right|_{T_0}. \quad (28)$$

A substitution here of the temperature oscillations from Eq. (27) gives a small time variations of the resistance

$$R(t) = R_0 \left(1 + \frac{R_0'}{\alpha} I_0^2 \cos^2(\omega t) \right). \quad (29)$$

Now we can calculate the source-drain voltage as

$$U_{SD}(t) = R(t)I_{SD}(t). \quad (30)$$

Substituting here the SD current from Eq. (25) and the SD resistance from Eq. (29) gives us for the SD voltage

$$U_{SD}(t) = U_{SD}^{(1f)} \cos(\omega t) + U_{SD}^{(3f)} \cos(3\omega t). \quad (31)$$

The coefficient in front of the first harmonic $U_{SD}^{(1f)} \approx R_0 I_0$ is determined by the SD resistance R_0 at low currents I_0 , while for the third harmonic signal using the elementary formula $\cos^3(\omega t) = (3 \cos(\omega t) + \cos(3\omega t))/4$ we obtain

$$U_{SD}^{(3f)} = \frac{U_{SD}^{(1f)}}{4\alpha} I_0^2 R_0'. \quad (32)$$

From this formula we can express the boundary thermo-resistance by electronic measurements

$$\alpha = \frac{U_{SD}^{(1f)}}{4U_{SD}^{(3f)}} I_0^2 R_0'. \quad (33)$$

The realization of the method requires fitting of $R(T)$ and numerical differentiation at working temperature T_0 ; the linear regression is probably the simplest method if we need to know only one point.

At known α we can express the time oscillations of the temperature substituting in Eq. (27)

$$T = T_0 + \frac{RI_0^2}{2\alpha} (1 + \cos(2\omega t)) \approx T_0 \left(1 + \frac{R_{SD}I_0^2}{2\alpha T_0} \cos(2\omega t) \right). \quad (34)$$

In this approximation terms containing I_0^4 are neglected and also we consider that the shift of the average temperature of the film is small.

The variations of the temperature lead to a variation of the work function of the film according to the well-known formula from the physics of metals

$$W(T) = -\frac{\pi^2}{6e} \frac{\nu'}{\nu} k_B^2 T^2, \quad \nu'(E_F) = \left. \frac{d\nu}{d\epsilon} \right|_{E_F}, \quad (35)$$

where the logarithmic derivative of the density of states $\nu(\epsilon)$ taken for the Fermi energy E_F has dimension of inverse energy, the work function W has dimension of voltage, T is the temperature in Kelvins and k_B is the Boltzmann constant. For an introduction see the standard textbooks on statistical physics and physics of metals.^{25,26} Substituting here the temperature variations from Eq. (34) gives

$$W = -\frac{\pi^2 k_B^2}{6e} \frac{\nu'}{\nu} T_0^2 \left[1 + \frac{R_0 I_0^2}{\alpha T_0} \cos(2\omega t) \right] + \mathcal{O}(I_0^4), \quad (36)$$

where the \mathcal{O} -function again marks that the terms having I_0^4 are negligible.

The oscillations of the temperature creates AC oscillations of the source-gate (SG) voltage. We suppose that a lock-in with a preamplifier, having high enough internal resistance is switched between the source and the gate. In these conditions the second harmonics of the work-function and of the SG voltage are equal

$$U_{SG}^{(2f)} = -\frac{\pi^2 k_B^2}{6e} \frac{\nu'}{\nu} T_0^2 \frac{R_0 I_0^2}{\alpha T_0}, \quad (37)$$

$$U_{SG}(t) = U_{SG}^{(2f)} \cos(2\omega t) + U_{SG}^{(4f)} \cos(4\omega t) + \dots$$

Substituting α from Eq. (33) we have

$$U_{SG}^{(2f)} = -\frac{4\pi^2 k_B^2}{6e} \frac{\nu'}{\nu} \frac{U_{SD}^{(3f)}}{I_0} \frac{T_0}{R_0'}. \quad (38)$$

From this equation we can finally express the pursued logarithmic derivative of the density of states

$$\left. \frac{d \ln \nu(\epsilon)}{d\epsilon} \right|_{E_F} = \frac{\nu'}{\nu} = -\frac{3e}{2\pi^2 k_B^2} \frac{I_0}{T_0} \frac{U_{SG}^{(2f)}}{U_{SD}^{(3f)}} \frac{dR}{dT}. \quad (39)$$

In such a way the logarithmic derivative of the density of states can be determined by fully electronic measurements with a FET. This important energy parameter can be used for absolute determination of the hopping integrals in the generic LCAO model. The realization of the experiment can be considered as continuation of already published detailed theoretical and experimental investigations and having a set of complementary researches we can reliably determine the LCAO parameters.

V. DISCUSSION AND CONCLUSIONS

The suggested LCAO model for FS of Tl:2201 describes the important qualitative properties of p_z modulation: vanishing of this modulation at 8 symmetric points of the 2D Fermi contours. This is an important hint that t_{ss} amplitude dominates in the formation of coherent 3D Fermi surface and other interlayer tunnelling amplitudes are irrelevant. This qualitative conclusion for the importance of Cu 4s c-axis tunnelling matrix elements is in agreement with the

long-predicted analysis by Andersen et al.⁶. We wish to add a few words concerning the pairing mechanism in Tl:2201 and cuprates in general. Wherever it is hidden its influence has to be reduced to effective momentum dependent scattering amplitude for electron pairs from conduction 3d band with opposite momentums; band structure created by 3d-2p-4s hybridization for which the revealing of FS is an indispensable first step.

Acknowledgements One of the authors (TM) is thankful to A. Damascelli, N. Hussey, and E. Penev for the interest to the paper, comments, technical help, suggestions and extra details from their research. The authors are thankful to S. Savova for collaboration in the initial stages of this research related to the preparation of the figures.

-
- * E-mail: martin.stoev@gmail.com
† E-mail: mishonov@phys.uni-sofia.bg
- ¹ D. Shoenberg *Magnetic oscillations in metals* (Cambridge: Cambridge University Press) (1984).
 - ² N.E. Hussey, M. Abdel-Jawad, A. Carrington and L. Balicas "Observation of a Coherent Three-Dimensional Fermi surface in a high- T_c Superconductor" *Nature* **425**, 814 (2003).
 - ³ A.A. Abrikosov *Physica C* **391**, 147-159 (2003).
 - ⁴ D.J. Singh and W.E. Pickett *Physica C* **203**, 193-199 (1992).
 - ⁵ J. Labbé and J. Bok *Europhys. Lett.* **3**, 1225-30 (1987).
 - ⁶ O.K. Andersen A.I. Liechtenstein O. Jepsen and F. Paulsen *J. Phys. Chem. Solids* **56**, 1573 (1995).
 - ⁷ T.M. Mishonov and E.S. Penev *J. Phys.: Condens. Matter* **12**, 143-159; cond-mat/0001049 (2000).
 - ⁸ R.P. Feynman R.B. Leighton M. Sands *The Feynman Lectures on Physics* (Addison-Wesley, London) Vol 3, Ch. 11 (1963).
 - ⁹ J.C. Slater *Electronic structure of molecules* (McGraw-Hill, London) Ch. 2 (1963).
 - ¹⁰ T.M. Mishonov, J.O. Indekeu and E.S. Penev *Int. J. Mod. Phys B* **16**, 4577 figure 1; cond-mat/0206350 (2002).
 - ¹¹ T.M. Mishonov, J.O. Indekeu and E.S. Penev *J. Phys.: Condens. Matter* **15**, 4429-4456 equation (2.4); cond-mat/0209191 (2003).
 - ¹² A. Damascelli *et al.* *Rev. Mod. Phys.* **75**, 473 (2003).
 - ¹³ M. Platé *et al.* "Fermi Surface Quasiparticle Excitations of Overdoped $Tl_2Ba_2CuO_{6+\delta}$ by ARPES," cond-mat/0503117 (2005).
 - ¹⁴ J. Friedel, *J. Phys.: Condens. Matt.* **1**, 7757 (1989);
 - ¹⁵ J. Labbe and J. Bok, *Europhys. Lett.* **3**, 1225 (1987);
 - ¹⁶ J. Bouvier and J. Bok, *J. Superconductivity* **10**, 673 (1997);
 - ¹⁷ J. Bouvier and J. Bok, *Physica C* **364-365**, 471 (2001);
 - ¹⁸ J. Bouvier and J. Bok, *Physica C* **288**, 217 (1997);
 - ¹⁹ R. S. Markiewicz, *J. Physics: Condens. Matt.* **2**, 665 (1990);
 - ²⁰ R. S. Markiewicz, *J. Phys. Chem. Solids* **58**, 1179-1310 (1997);
 - ²¹ D. M. Newns, C. C. Tsuei and P. C. Pattnaik, *Phys. Rev.* **52**, 13611 (1995);
 - ²² C. C. Tsuei, C. C. Chi, D. M. Newns, P. C. Pattnaik and Däumling, *Phys. Rev. Lett.* **69**, 2134 (1992);
 - ²³ T.M. Mishonov, N. Chénne, D. Robes and J.O. Indekeu, "Generation of 3rd and the harmonics in a thin superconducting film by temperature and isothermal nonlinear current response" *Eur. Phys. J. B* **26**, 291-296 (2002); cond-mat/0109478.
 - ²⁴ N. Chénne, T.M. Mishonov, and J.O. Indekeu, "Observation of a sharp lambda peak in the third harmonic voltage response of YBaCuO film" *Eur. Phys. J. B* **32**, 437-444 (2003); cond-mat/0110632.
 - ²⁵ L. D. Landau and E. M. Lifshitz, *Statistical Physics*, Part 1, Chapter 5, (Pergamon, New York, 1977);
 - ²⁶ I. M. Lifshitz, M. Y. Azbel and M. I. Kaganov *Electron Theory of Metals* (Consultants Bureau, New York, 1973);

VI. APPENDIX A: CALCULATION OF EIGENVECTOR

In the equation for eigenvectors $(H_p^{(2D)} - \epsilon(\mathbf{p})\mathbb{1})\psi_p$, with $H_p^{(2D)}$ from (8) we search for a solution in the form $\psi_p = (1, S_p, X_p, Y_p)$. In such a way we obtain the system

$$\begin{pmatrix} -\varepsilon_s & t_{sp}s_x & t_{sp}s_y \\ t_{sp}s_x & -\varepsilon_p & -t_{pp}s_x s_y \\ t_{sp}s_y & -t_{pp}s_x s_y & -\varepsilon_p \end{pmatrix} \begin{pmatrix} S \\ X \\ Y \end{pmatrix} = \begin{pmatrix} 0 \\ -t_{pd}s_x \\ t_{pd}s_y \end{pmatrix}. \quad (40)$$

The solution $S = \Delta_S/\Delta$, $X = \Delta_X/\Delta$, $Y = \Delta_Y/\Delta$ is presented by the determinants

$$\Delta = \det \begin{pmatrix} -\varepsilon_s & t_{sp}s_x & t_{sp}s_y \\ t_{sp}s_x & -\varepsilon_p & -t_{pp}s_x s_y \\ t_{sp}s_y & -t_{pp}s_x s_y & -\varepsilon_p \end{pmatrix}, \quad (41)$$

$$\Delta_S = \det \begin{pmatrix} 0 & t_{sp}s_x & t_{sp}s_y \\ -t_{pd}s_x & -\varepsilon_p & -t_{pp}s_x s_y \\ t_{pd}s_y & -t_{pp}s_x s_y & -\varepsilon_p \end{pmatrix}, \quad (42)$$

$$\Delta_X = \det \begin{pmatrix} -\varepsilon_s & 0 & t_{sp}s_y \\ t_{sp}s_x & -t_{pd}s_x & -t_{pp}s_x s_y \\ t_{sp}s_y & t_{pd}s_y & -\varepsilon_p \end{pmatrix}, \quad (43)$$

$$\Delta_Y = \det \begin{pmatrix} -\varepsilon_s & t_{sp}s_x & 0 \\ t_{sp}s_x & -\varepsilon_p & -t_{pd}s_x \\ t_{sp}s_y & -t_{pp}s_x s_y & t_{pd}s_y \end{pmatrix}. \quad (44)$$

Multiplication by Δ gives the eigen vector $(D, S, X, Y) = (\Delta, \Delta_S, \Delta_X, \Delta_Y)$ presented in equation (12).