

Determinations of upper critical field in continuous Ginzburg-Landau model

L. Wang, H. S. Lim, and C. K. Ong

*Center for Superconducting and Magnetic Materials and Department of Physics,
National University of Singapore, 2 Science Drive 3, Singapore 117542.*

Novel procedures to determine the upper critical field B_{c2} have been proposed within a continuous Ginzburg-Landau model. Unlike conventional methods, where B_{c2} is obtained through the determination of the smallest eigenvalue of an appropriate eigen equation, the square of the magnetic field is treated as eigenvalue problems so that the upper critical field can be directly deduced. The calculated B_{c2} from the two procedures are consistent with each other and in reasonably good agreement with existing theories and experiments. The profile of the order parameter associated with B_{c2} is found to be Gaussian-like, further validating the methodology proposed. The convergences of the two procedures are also studied.

I. INTRODUCTION

The determinations of the upper critical field B_{c2} are based on the Ginzburg-Landau-Abrikosov-Gorkov^{1,2,3} (GLAG) framework that is applicable to practically all superconductors. The starting point of the macroscopic description is the first Ginzburg-Landau (GL) equation^{1,2} or its similarities. Examples would be the standard linearized GL equation⁴, the harmonic oscillator equation^{2,5,6,7}, the Mathieu equation^{8,9,10}, the continuous Ginzburg-Landau equation¹¹, the GLd equation(s)^{12,13,14,15} [Ginzburg-Landau model for (d+s)-wave superconductors], and the Ginzburg-Pitaevskii equation¹⁶.

On the other hand, the linear gap equation^{3,17,18} is adopted to microscopically determine the upper critical field. This equation can be converted into an equation including the digamma function. The parameter of the digamma function is related to the smallest eigenvalue of an eigen equation with appropriate boundary conditions. Having obtained the smallest eigenvalue of the eigen equation, B_{c2} may then be implicitly determined from the equation including the digamma function (B_{c2} is in connection with the smallest eigenvalue). Such a procedure or its extensions may be seen, for example, in the calculations of B_{c2} for type-II superconductors^{19,20} (s-wave), heavy-fermion superconductors^{21,22} (p-wave), high T_c superconductors^{23,24} [(d+s)-wave], layered superconductors^{10,25,26}, superlattices^{27,28}, thin films^{29,30}, multilayers³¹ and organic superconductors³².

It is tempting to conclude that almost all the efforts^{2,4,5,6,7,8,9,10,11,12,13,14,15,19,20,21,22,23,24,25,26,27,28,29,30,31,32} made to obtain B_{c2} are via the determination of the smallest eigenvalue of an appropriate eigen equation. For instance, in Ref. 6, B_{c2} is inversely proportional to the smallest eigenvalue (the lowest Landau level) of the harmonic oscillator equation.

Nevertheless, for all the GL-like equations as well as the linear gap equation, one may have a universal definition for the upper critical field: it is the maximum magnetic field at which the corresponding equation has a non-trivial solution³³. Such a nontrivial solution would naturally correspond to the eigen function associated with

the smallest eigenvalue and would correspond to the solution to the linear gap equation at B_{c2} ³⁴. It is worth noting that the eigen function associated with the smallest eigenvalue may be just one of the solutions to the linear gap equation (see, for example, Refs. 17, 20 and 35).

Several approaches, for example, the perturbation method^{7,12,15} and the variational technique^{13,14}, have been adopted to find B_{c2} by obtaining the smallest eigenvalue. We note that in Ref. 4, the authors iteratively calculated the upper critical field of a thin-film superconductor with a ferromagnetic dot: first guessing a value for the upper critical field, then solving the standard linearized GL equation to make sure the calculated value of the upper critical field is equal to the guessed one. Otherwise, equate the newly calculated value to the guessed one and resolve the linear equation until the two values are equal to each other. It can be seen that such an iterative method is still related to obtaining the smallest eigenvalue⁴.

In this paper, instead of obtaining the smallest eigenvalue, from which B_{c2} is implicitly or indirectly determined, we will directly calculate B_{c2} : the square of the magnetic field B^2 is treated as an eigenvalue of an eigen equation so that B_{c2} can be directly deduced from the largest eigenvalue of the eigen equation. Within a continuous Ginzburg-Landau model³⁶, two procedures will be presented to obtain the corresponding eigen equations, either of which can determine B_{c2} . Note that the applications of these procedures have been published in Refs. 37 and 38.

II. MODEL

The continuous Ginzburg-Landau model (CGL) is applicable to layered superconductors³⁶. The unit cell describing the layering structure consists of alternating superconducting (S) and insulating (I) layers. The z axis is normal to the layers and its origin is at the midpoint of one of the I layers. The center of the S layer is located at $D/2$, where D is the size of the unit cell³⁸. The GL coefficients and the effective superpair masses (perpen-

dicular and parallel to the layers) in the CGL free energy

are spatially dependent. The CGL free energy is,

$$F = \int d\vec{r} \int dz \left[\alpha(T, z) |\Psi(\vec{r}, z)|^2 + \frac{1}{2} \beta |\Psi(\vec{r}, z)|^4 + \frac{\hbar^2}{2M(z)} \left| \left(\frac{\partial}{\partial z} - \frac{2ie}{\hbar} A_z(\vec{r}, z) \right) \Psi(\vec{r}, z) \right|^2 + \frac{\hbar^2}{2m(z)} \left| \left(\nabla^{(2)} - \frac{2ie}{\hbar} \vec{A}^{(2)}(\vec{r}, z) \right) \Psi(\vec{r}, z) \right|^2 + \frac{1}{2\mu_0} B^2(\vec{r}, z) \right], \quad (1)$$

where T is the temperature, $\vec{r} = (x, y)$ is the planar vector and $\vec{A}(\vec{r}, z) = (\vec{A}^{(2)}(\vec{r}, z), A_z(\vec{r}, z))$ is the vector potential. The effective masses and the GL condensation coefficient $\alpha(T, z)$ are assumed to be periodic with a period D . β , however, is held fixed as it does not affect the qualitative behavior of the studied system³⁹. As before^{36,37,38,40}, we choose

$$\alpha(T, z) = [\alpha_0 + \alpha_1 \cos(2\pi z/D)] (1 - T/T_c), \quad (2a)$$

$$\frac{1}{M(z)} = G_0 + G_1 \cos(2\pi z/D), \quad (2b)$$

$$\frac{1}{m(z)} = g_0 + g_1 \cos(2\pi z/D), \quad (2c)$$

where T_c is the transition temperature. $\alpha_0, \alpha_1, G_0, G_1, g_0$ and g_1 are model parameters. Note that for dirty materials, the linear GL theory for B_{c2} may be extended to low temperatures^{5,19,35}.

Let an external field B be applied along the y -direction so that the vector potential can be taken as $\vec{A} = (Bz, 0, 0)$. Assuming $\Psi(\vec{r}, z) = e^{ik_{\parallel} \cdot \vec{r}} \Psi(z)$ and minimizing the free energy of Eq. 1, we get

$$-\frac{\hbar^2}{2M(z)} \frac{\partial^2}{\partial z^2} \Psi(z) - \frac{\hbar^2}{2} \left[\frac{\partial}{\partial z} \frac{1}{M(z)} \right] \frac{\partial}{\partial z} \Psi(z) + \left[\frac{1}{2m(z)} (2eB)^2 (z - z_s)^2 + \frac{\hbar^2 k_y^2}{2m(z)} \right] \Psi(z) + \alpha(T, z) \Psi(z) + \beta |\Psi(z)|^2 \Psi(z) = 0, \quad (3)$$

with $z_s = \hbar k_x / (2eB)$. At $B = B_{c2}$, the order parameter is small enough so that the term $\beta |\Psi(z)|^2 \Psi(z)$ in Eq. 3 can be omitted. The superconducting order at B_{c2} nucleates in the S layer first so that one may choose $z_s = D/2$ ¹¹. To explore the features of the order parameter along the z -direction, one may assume $k_y = 0$. Finally, we arrive at the following equation,

$$-\frac{\hbar^2}{2M(z)} \frac{\partial^2}{\partial z^2} \Psi(z) - \frac{\hbar^2}{2} \left[\frac{\partial}{\partial z} \frac{1}{M(z)} \right] \frac{\partial}{\partial z} \Psi(z) + \left[\alpha(T, z) + \frac{1}{2m(z)} (2eB)^2 \left(z - \frac{D}{2} \right)^2 \right] \Psi(z) = 0. \quad (4)$$

At a given temperature T , the maximum magnetic field B at which a nontrivial solution satisfies the above equation gives a point in the B_{c2} - T plot. Eq. 4 will be numerically solved subject to the following boundary conditions,

$$\Psi(0) = \Psi(D), \quad (5a)$$

$$\frac{\partial}{\partial z} \Psi(z) \Big|_{z=D} = 0. \quad (5b)$$

Note that neglecting the size effect in the z -direction and considering the layering structure and the superposition of different superpairs as a mean field effect, the variation of the macroscopic wave function-the order parameter along the z -direction may have a periodic property (for example, see Ref. 11). It should be mentioned that the new methodology of determining the upper critical field, which is to be described below, is also applicable to other boundary conditions^{38,40}.

III. METHODOLOGY

A. Procedure I

Taking into account the boundary conditions of Eq. 5, Eq. 4 can be transformed into a system of equations which can be simplified to

$$\mathbf{U}\Psi = 0, \quad (6)$$

where $\Psi = (\Psi_1, \Psi_2, \dots, \Psi_{2n+1})'$ is a column vector representing the discrete solutions of Eq. 4. The symbol $'$ here indicates transpose and n is a positive integer. \mathbf{U} is a $(2n+1) \times (2n+1)$ sparse matrix having the following structure⁴⁰,

$$\begin{pmatrix}
C_2^{0'} - \frac{2}{3}B_2' & D_2' & E_2' & & & & -\frac{1}{3}B_2' & A_2' + 2B_2' \\
B_3' - \frac{2}{3}A_3' & C_3^{0'} & D_3' & E_3' & & & -\frac{1}{3}A_3' & 2A_3' \\
A_4' & B_4' & C_4^{0'} & D_4' & E_4' & & & \\
\vdots & \vdots & \vdots & \vdots & \vdots & & & \\
A_{n-2}' & B_{n-2}' & C_{n-2}^{0'} & D_{n-2}' & E_{n-2}' & & & \\
& A_{n-1}' & B_{n-1}' & C_{n-1}^{0'} & D_{n-1}' - \frac{2}{3}E_{n-1}' & 2E_{n-1}' & -\frac{1}{3}E_{n-1}' & \\
& & A_n' & B_n' & C_n^{0'} - \frac{2}{3}D_n' & E_n' + 2D_n' & -\frac{1}{3}D_n' & \\
& & & A_{n+2}' - \frac{2}{3}B_{n+2}' & C_{n+2}^{0'} + 2B_{n+2}' & D_{n+2}' - \frac{1}{3}B_{n+2}' & E_{n+2}' & \\
& & & -\frac{2}{3}A_{n+3}' & \frac{1}{3}A_{n+3}' + 2A_{n+3}' & C_{n+3}^{0'} - \frac{1}{3}A_{n+3}' & D_{n+3}' & E_{n+3}' \\
& & & & A_{n+4}' & B_{n+4}' & C_{n+4}^{0'} & D_{n+4}' & E_{n+4}' \\
& & & & & \vdots & \vdots & \vdots & \\
& & & & & & A_{2n-2}' & B_{2n-2}' & C_{2n-2}^{0'} & D_{2n-2}' & E_{2n-2}' \\
& & & & & & -\frac{2}{3}E_{2n-1}' & A_{2n-1}' & B_{2n-1}' & C_{2n-1}^{0'} - \frac{1}{3}E_{2n-1}' & D_{2n-1}' + 2E_{2n-1}' \\
& & & & & & E_{2n}' - \frac{2}{3}D_{2n}' & A_{2n}' & B_{2n}' - \frac{1}{3}D_{2n}' & C_{2n}^{0'} + 2D_{2n}' &
\end{pmatrix}, \quad (12)$$

where $A_i' = -A_i/C_i^B$, $B_i' = -B_i/C_i^B$, $C_i^{0'} = -C_i^0/C_i^B$, $D_i' = -D_i/C_i^B$ and $E_i' = -E_i/C_i^B$. Here, $i \neq n+1$ and thus the division singularity is avoided. Having determined B_{c2} from Eq. 11, one can obtain the corresponding order parameter by substituting B_{c2} back into Eq. 6.

B. Procedure II

In the above procedure, the upper critical field is obtained by treating the square of the magnetic field B^2

as an eigenvalue (Eq. 11). Following the same idea, one may obtain a straight forward procedure from Eq. 4:

$$\mathbf{Q}\Psi = B^2\Psi, \quad (13)$$

where $\Psi = (\Psi_1, \Psi_2, \dots, \Psi_{2n})'$, which has the same meaning as that in Eq. 6. However, to avoid the singularity at $z = D/2$, the dimension of the current Ψ , $2n$, is set different from the previous one, $2n+1$. The matrix \mathbf{Q} has the following structure⁴⁰,

$$\begin{pmatrix}
C_1^0 & D_1 & E_1 & & & & A_1 & B_1 \\
B_2 & C_2^0 & D_2 & E_2 & & & & A_2 \\
A_3 & B_3 & C_3^0 & D_3 & E_3 & & & \\
& A_4 & B_4 & C_4^0 & D_4 & E_4 & & \\
& & & & & & \ddots & \\
& & & & & & & A_{2n-3} & B_{2n-3} & C_{2n-3}^0 & D_{2n-3} & E_{2n-3} \\
& & & & & & & A_{2n-2} & B_{2n-2} & C_{2n-2}^0 & D_{2n-2} & E_{2n-2} \\
& & & & & & & A_{2n-1} & B_{2n-1} & C_{2n-1}^0 & D_{2n-1} \\
& & & & & & & & A_{2n} & B_{2n} & C_{2n}^0
\end{pmatrix}. \quad (14)$$

The dimension of \mathbf{Q} is $2n \times 2n$, larger than that of \mathbf{P} but smaller than that of \mathbf{U} .

Eq. 13 implies that one may directly determine the upper critical field from the linear GL equation. The

present procedure is essentially consistent with the usual method for obtaining B_{c2} through the smallest eigenvalue of the linear GL equation since there exists an inverse relation between the magnetic field eigenvalues and the eigenvalues (or the indices of the Landau levels) of the linear GL equation (for example, see Ref. 6). Our procedures (particularly Procedure II) indicate that one may directly determine the upper critical field without considering the smallest eigenvalue of an appropriate eigen equation. In fact, in one of the earliest papers⁴¹, Gor'kov simply used a variational method to obtain B_{c2} .

IV. RESULTS AND DISCUSSION

Bi2212 has been chosen as our modeling prototype since it possesses a large anisotropy⁴², and is thus suitable for studies of properties related to the layered structure. The values of the parameters for Bi2212 are taken from Ref. 37. The calculated B_{c2} at zero temperature for various n are shown in Table I. It can be seen that the two sets of data calculated from Eqs. 11 and 13 converge finally and the convergent values are in good agreement with each other.

A glance at the data for B_{c2} in Table I shows that Procedure II converges more rapidly than Procedure I. Hence, using $B_{c2}(n = 1200)$ from Procedure II for the convergence analysis, the error is defined as

$$E_n = |B_{c2}(n) - B_{c2}(n = 1200)|. \quad (15)$$

This equation is applicable to both procedures and the corresponding errors are listed in Table I and plotted in Fig. 1. It is found that the errors of the two procedures can be respectively fitted as

$$E_n = \begin{cases} E_{n_0}(n_0/n)^3 \propto h^3 & \text{for Procedure I,} \\ E_{n_0}(n_0/n)^4 \propto h^4 & \text{for Procedure II.} \end{cases} \quad (16)$$

TABLE I: Values of B_{c2} (SI unit) for various n , treated as eigenvalue problems from different procedures. The error is $E_n = |B_{c2}(n) - B_{c2}(n = 1200)|$, where $B_{c2}(n = 1200) = 3338.680126$ Tesla.

| eigen equation | n | B_{c2} | E_n |
|-----------------------|-----|-------------|----------|
| Eq. 11 (Procedure I) | 50 | 3265.749101 | 72.93 |
| | 100 | 3328.453273 | 10.23 |
| | 200 | 3337.366302 | 1.314 |
| | 400 | 3338.513958 | 0.1662 |
| | 800 | 3338.658438 | 0.02169 |
| Eq. 13 (Procedure II) | 50 | 3339.154981 | 0.4749 |
| | 100 | 3338.709744 | 0.02962 |
| | 200 | 3338.681966 | 0.001840 |
| | 400 | 3338.680240 | 1.135E-4 |
| | 800 | 3338.680132 | 6.020E-6 |

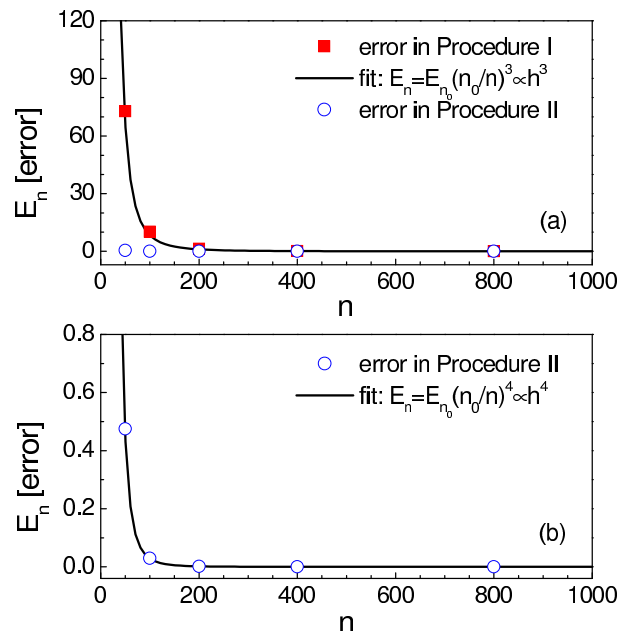


FIG. 1: Errors for Procedure I and Procedure II, which are of order 3 and 4, respectively.

Here n_0 is taken to be 50 and E_{n_0} is the corresponding error. The grid spacing $h \sim D/2n$, when n is large. From these fits, we know that the error of Procedure I is of order 3 while that of Procedure II is 4, which are consistent with the error orders of the approximations used in the matrices \mathbf{U} and \mathbf{Q} , respectively.

Note that B_{c2} at 0 K in the tables may be comparable to those extrapolated (using the WHH theory²⁰) from some experiments (for example, see Ref. 43). By choosing appropriate values of the model parameters, the extrapolated result of 2640 Tesla for Bi2212⁴³ can be obtained exactly.

We find that the order parameters obtained from Eqs. 6 and 13 are also consistent with each other. In the following calculations, Procedure II is employed. In Fig. 2, we plot the spatial distribution of the calculated order parameter at $T/T_c = 0.9$. It is found that for Bi2212 in a large temperature range, the asymptotic behavior of the order parameter can be expressed as

$$\Psi(z) \sim C \exp \left[-\frac{(z - D/2)^2}{2\xi^2} \right], \quad (17)$$

which is exactly the ground state of the linearized GL equation at B_{c2} ^{2,5}. The Gaussian profile of the order parameter is also similar to the shape of the pair amplitude in bulk superconductors. In fact, it is natural that the order parameter of the largest eigenvalue of B^2 should be just that of the lowest eigenvalue for the linear equation, due to the inverse relation between B and the eigenvalues of the linear equation^{5,6}.

When near T_c or in a less anisotropic superconductor such as YBCO, we found that an offset of the Gaussian

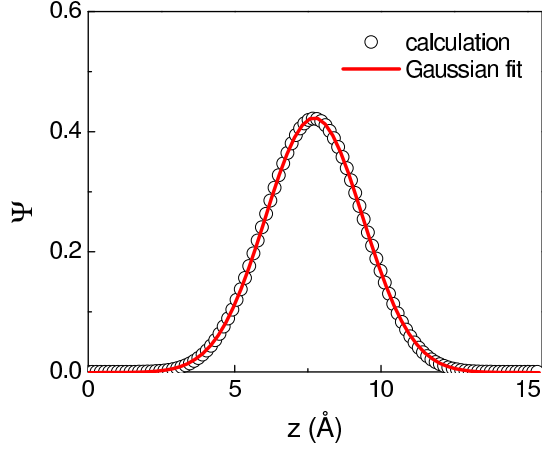


FIG. 2: Spatial distribution of the order parameter at $T/T_c = 0.9$, which can be approximated by the well-known Gaussian function.

order parameter (Eq. 17) can not be neglected. Hence, one may infer that the mean field effect or the interlayer coupling³⁶ of the order parameter has less influence on a highly anisotropic superconductor at low temperatures (2-D feature) than on a superconductor at high temperatures or with a small anisotropy³⁷.

The finding here that a Gaussian-like exponential component contributes to the order parameter may adequately signify that the eigen function associated with the maximum magnetic field eigenvalue of the linear GL equation is equivalent, to a certain extent, to the eigen function related to the lowest eigenvalue of the linear GL equation. The latter eigen function may have the form $\exp\left[\frac{B_{c2}\pi}{\Phi_0}(z - D/2)^2\right]$ (cf. Eq. 4.73 in Ref. 5). Comparing this function to the Gaussian-like exponential contribution (Eq. 17), one has $B_{c2} \propto 1/\xi^2$. For Bi2212, we find that $1/\xi^2 \propto 1 - T/T_c$ is satisfied for a large temperature

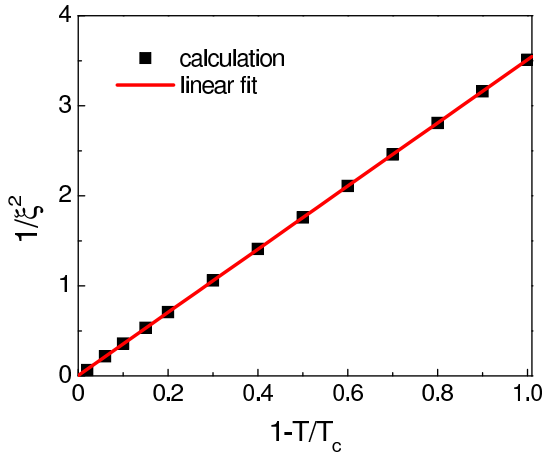


FIG. 3: Linear relation between $1/\xi^2$ and $1 - T/T_c$, where ξ is the parameter characterizing the width of the Gaussian order parameter.

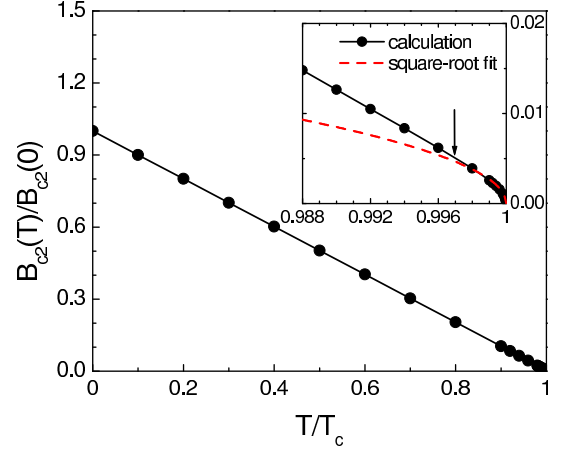


FIG. 4: The B_{c2} - T behavior is linear in a large temperature range but square-root-like near T_c (inset). The solid circles (\bullet) stand for the calculated data and the full lines are guidances to the eye. The dashed line represents a square-root fit. The reduced temperature of the transition point from square-root to linearity is about 0.997 (indicated by the arrow).

range (Fig. 3), hence, $B_{c2} \propto 1 - T/T_c$ (see Fig. 4). Similarly, we also have found that the linear B_{c2} - T relation is satisfied in YBCO. Such a linear feature is consistent with the general B_{c2} - T picture in layered cuprates near $T = 0$ K⁴⁴, and is in agreement with the anisotropic GL theory and some other theories^{9,12,45,46}. Experimentally, the linear behavior away from T_c was observed in YBCO^{51,52}.

A closer inspection of Fig. 4 reveals that near T_c , the B_{c2} - T plot exhibits a square-root-like behavior which is in agreement with Feinberg's theory⁴⁵. This behavior is also found in twined superconductors⁴⁷, multilayers⁴⁸, and thin films^{5,49}. In one of the earliest papers, Ginzburg and Landau¹ correctly predicted that B_{c2} for thin films varied as $\sqrt{T_c - T}$ when $T \rightarrow T_c$, as a consequence of the boundary conditions. This was subsequently confirmed experimentally by Khukhareva⁵⁰.

In our calculations, we found that near T_c , the height of the Gauss component C in Eq. 17 decreases with temperature and hence, the order parameter is nearly constant (3-D feature)^{38,40}. Qualitatively speaking, the nearly constant order parameter near T_c for the layered superconductors is equivalent to the case of thin films so that one can observe the square-root behavior near T_c . In fact, the boundary condition of Eq. 5b does apply to thin films. More precisely, with a constant solution to the order parameter, one can immediately infer from Eq. 4 that there exists a square-root relationship between B_{c2} and $1 - T/T_c$. It is worth noting that Dediu *et al.* also obtained a square-root $B_{c2} - T$ relation near T_c by solving the usual GL equations and the feature of the order parameter near T_c was used to interpret their results.

It is interesting to note that in the B_{c2} - T plot, the transition from square-root to linearity may be consid-

ered as a 3-D to 2-D crossover. The transition temperature obtained here (indicated by the arrow in Fig. 4) is reasonably consistent with the estimates in Refs. 5 and 53.

V. CONCLUSION

The conventional work to determine upper critical fields should resort to obtaining the smallest eigenvalue of an appropriate eigen equation. However, within a continuous Ginzburg-Landau model, we have demonstrated through two procedures that one can obtain the upper critical field by treating the square of the magnetic field as eigenvalue problems, from which B_{c2} can be directly deduced.

The calculated B_{c2} from the two procedures are consis-

tent with each other and in reasonably good agreement with existing theories and experiments. The profile of the order parameter obtained at B_{c2} is Gaussian-like, further indicating the plausibility of the procedures proposed.

The convergences of the proposed procedures were also investigated to identify the efficiency of the procedures. It was found that the more direct method, Procedure II, converges faster than Procedure I. The corresponding convergent error orders of the two procedures are 4 and 3, respectively. These orders are consistent with the orders of the approximations used in our calculations.

Note that certain physical phenomena such as fluctuations and spin-orbit scattering may have some influences on the upper critical field. The present procedures proposed may serve as a starting point to further study more properties of upper critical fields.

-
- ¹ V. L. Ginzburg and L. D. Landau, Zh. Eksp. Teor. Fiz. **20**, 1064 (1950).
 - ² A. A. Abrikosov, Zh. Eksp. Teor. Fiz. **32**, 1442 (1957) [Sov. Phys.-JETP **5**, 1174 (1957)].
 - ³ L. P. Gor'kov, Zh. Eksp. Teor. Fiz. **36**, 1918 (1959) [Sov. Phys.-JETP **9**, 1364 (1959)]; **37**, 1407 (1959) [**10**, 998 (1960)].
 - ⁴ S. L. Cheng and H. A. Fertig, Phys. Rev. B **60**, 13107 (1999).
 - ⁵ M. Tinkham, *Introduction to Superconductivity* (Mcgraw-Hill, Inc., 1996).
 - ⁶ T. V. Duzer and C. W. Turner, *Principles of Superconductive Devices and Circuits* (Prentice-Hall, Inc. 1999).
 - ⁷ B. Y. Jin and J. B. Ketterson, Adv. Phys. **38**, 189 (1989).
 - ⁸ L. N. Bulaevskii, Usp. Fiz. Nauk **116**, 449 (1975) [Sov. Phys.-Usp. **18**, 514 (1976)].
 - ⁹ T. Schneider and A. Schmidt, Phys. Rev. B **47**, 5915 (1993).
 - ¹⁰ R. A. Klemm, A. Luther, and M. R. Beasley, Phys. Rev. B **12**, 877 (1975).
 - ¹¹ T. Koyama, N. Takezawa, Y. Naruse, and M. Tachiki, Physica C **194**, 20 (1992).
 - ¹² R. Joynt, Phys. Rev. B **41**, 4271 (1990).
 - ¹³ A. J. Berlinsky, A. L. Fetter, M. Franz, C. Kallin, and P. I. Soininen, Phys. Rev. Lett. **75**, 2200 (1995).
 - ¹⁴ M. Franz, C. Kallin, P. I. Soininen, A. J. Berlinsky, and A. L. Fetter, Phys. Rev. B **53**, 5795 (1996).
 - ¹⁵ D. Chang, C. Y. Mou, B. Rosenstein, and C. L. Wu, Phys. Rev. B **57**, 7955 (1998).
 - ¹⁶ A. S. Alexandrov, Phys. Rev. B **48**, 10571 (1993); A. S. Alexandrov, V. N. Zavaritsky, W. Y. Liang, and P. L. Nevsky, Phys. Rev. Lett. **76**, 983 (1996).
 - ¹⁷ P. G. de Gennes, Rev. Mod. Phys. **36**, 225 (1964).
 - ¹⁸ N. R. Werthamer, Phys. Rev. **132**, 2440 (1963).
 - ¹⁹ K. Maki, Physics **1**, 21 (1964); Phys. Rev. **148**, 362 (1966).
 - ²⁰ E. Helfand and N. R. Werthamer, Phys. Rev. **147**, 288 (1966); N. R. Werthamer, E. Helfand, and P. C. Hohenberg, Phys. Rev. **147**, 295 (1966).
 - ²¹ K. Scharnberg and R. A. Klemm, Phys. Rev. B **22**, 5233 (1980).
 - ²² I. A. Luk'yanchuk and V. P. Mineev, Zh. Eksp. Teor. Fiz. **93**, 2030 (1987) [Sov. Phys.-JETP **66**, 1168 (1987)].
 - ²³ C. T. Rieck, Th. Wölkhausen, D. Fay, and L. Tewordt, Phys. Rev. B **39**, 278 (1989).
 - ²⁴ K. Maki and M. T. Beal-Monod, Phys. Rev. B **55**, 11730 (1997).
 - ²⁵ Yu. N. Ovchinnikov and V. Z. Kresin, Phys. Rev. B **54**, 1251 (1996).
 - ²⁶ A. G. Lebed and K. Yamaji, Phys. Rev. Lett. **80**, 2697 (1998); A. G. Lebed, J. Supercond. **12**, 453 (1999).
 - ²⁷ S. Takahashi and M. Tachiki, Phys. Rev. B **33**, 4620 (1986).
 - ²⁸ B. J. Yuan and J. P. Whitehead, Phys. Rev. B **44**, 6943 (1991).
 - ²⁹ B. J. Yuan and J. P. Whitehead, Physica C **231**, 395 (1994).
 - ³⁰ R. A. Smith, B. S. Handy, and V. Ambegaokar, Phys. Rev. B **61**, 6352 (2000).
 - ³¹ Y. Kuwasawa, T. Nojima, S. Hwang, B. J. Yuan, and J. P. Whitehead, Physica B **222**, 92 (1996).
 - ³² X. Z. Huang and K. Maki, Phys. Rev. B **39**, 6459 (1989).
 - ³³ In Ref. 16, the first nontrivial extended solution to the Ginzburg-Pitaevskii equation appears at $B = B_{c2}$ when the chemical potential coincides with the energy of the lowest extended state (i.e., the lowest delocalized energy). The chemical potential may be simply defined as the minimal energy that is needed to add to a statistical system. Hence, when coinciding with the lowest delocalized energy, the chemical potential may be considered as "the lowest eigenvalue" of the Ginzburg-Pitaevskii equation.
 - ³⁴ Note, however, that in Ref. 26, the linear Gor'kov gap equation may have different solutions, which may lead to the problem of the reentrant superconductivity.
 - ³⁵ L. P. Gor'kov and N. B. Kopnin, Usp. Fiz. Nauk **116**, 413 (1975) [Sov. Phys.-Usp. **18**, 496 (1976)].
 - ³⁶ L. Wang, H. S. Lim, and C. K. Ong, Supercond. Sci. Technol. **14**, 252 (2001).
 - ³⁷ L. Wang, H. S. Lim, and C. K. Ong, Supercond. Sci. Technol. **14**, 754 (2001).
 - ³⁸ L. Wang, H. S. Lim, and C. K. Ong, Physica C **383**, 247 (2002).
 - ³⁹ R. Kleiner and P. Müller, Physica C **293**, 156 (1997).

- ⁴⁰ L. Wang, Ph.D. thesis, National University of Singapore, 2002.
- ⁴¹ L. P. Gor'kov, Zh. Eksp. Teor. Fiz. **37**, 833 (1959) [Sov. Phys.-JETP **10**, 593 (1960)].
- ⁴² D. E. Farrell, S. Bonham, J. Foster, Y. C. Chang, P. Z. Jiang, K. G. Vandervoort, D. J. Lam, and V. G. Kogan, Phys. Rev. Lett. **63**, 782 (1989).
- ⁴³ T. T. M. Palstra, B. Batlogg, L. F. Schneemeyer, R. B. van Dover, and J. V. Waszczak, Phys. Rev. B **38**, 5102 (1988).
- ⁴⁴ Vladimir Z. Kresin, Yu. N. Ovchinnikov, and Stuart A. Wolf, J. Supercond. **12**, 493 (1999).
- ⁴⁵ D. Feinberg, S. Theodorakis, and A. M. Ettouhami, Phys. Rev. B **49**, 6285 (1994).
- ⁴⁶ S. Theodorakis and Z. Tešanović, Phys. Rev. B **40**, 6659 (1989).
- ⁴⁷ M. M. Fang, V. G. Kogan, D. K. Finnemore, J. R. Clem, L. S. Chumbley, and D. E. Farrell, Phys. Rev. B **37**, 2334 (1988).
- ⁴⁸ Z. Radović, L. Dobrosavljević-Grujić, A. I. Buzdin, and J. R. Clem, Phys. Rev. B **38**, 2388 (1988).
- ⁴⁹ V. V. Averin, A. I. Buzdin, and L. N. Bulaevskii, Zh. Eksp. Teor. Fiz. **84**, 737 (1983) [Sov. Phys.-JETP **57**, 426 (1983)].
- ⁵⁰ I. S. Khukhareva, Zh. Eksp. Teor. Fiz. **41**, 728 (1961) [Sov. Phys.-JETP **14**, 526 (1962)].
- ⁵¹ U. Welp, W. K. Kwok, G. W. Crabtree, K. G. Vandervoort, and J. Z. Liu, Phys. Rev. Lett. **62**, 1908 (1989).
- ⁵² J. S. Moodera, R. Meservey, J. E. Tkaczyk, C. X. Hao, G. A. Gibson, and P. M. Tedrow, Phys. Rev. B **37**, 619 (1988).
- ⁵³ A. I. Sokolov, Physica C **174**, 208 (1991).