

# Walks on weighted networks

An-Cai Wu,<sup>1</sup> Xi-Jian Xu,<sup>2</sup> Zhi-Xi Wu,<sup>1</sup> and Ying-Hai Wang<sup>1,\*</sup>

<sup>1</sup>*Institute of Theoretical Physics, Lanzhou University, Lanzhou Gansu 730000, China*

<sup>2</sup>*Department of Electronic Engineering, City University of Hong Kong, Kowloon, Hong Kong, China*

(Dated: December 2, 2024)

We investigate the dynamics of random walks on weighted networks. Assuming that edge's weight and node's strength are used as local information by a random walker, we study two kinds of walks, weight-dependent walk and strength-dependent walk. Exact expressions for stationary distribution and average return time are derived and confirmed by computer simulations. We also compute the mean-square displacement and the network coverage on the given graph. It is found that a weight-dependent walker can arrive at new territory more easily than a strength-dependent one, which results in the efficiency of the weight-dependent walk in the network coverage.

PACS numbers: 89.75.Hc, 05.40.Fb, 89.75.Fb

There has been a long history of studying random walks to model various dynamics in physical, biological, social, and economic systems [1]. A large body of theoretical results are available for random walks performed on regular lattices and on the Cayley (or regular) trees [2, 3], which are defined to be trees with homogeneous vertex degree. However, it has been suggested recently that more complex networks as opposed to regular graphs and conventional random graphs [4] are concerned to real worlds. Particularly, important classes of random graphs such as small-world networks [5] and scale-free networks [6] were proposed and have been examined in the last several years. These networks share some important properties with real networks, such as the clustering property, short average path length, and the power-law of the vertex degree distributions. They have been applied to the analysis of various social, engineering, and biological networks including epidemic spreading, percolation, and synchronization, *et al* [7, 8, 9, 10].

Recently, there have been several studies of random walks on small-world networks [11, 12, 13, 14] and on scale-free networks [15, 16, 17, 18]. Most of studies of random walks focus on unweighted networks, however, the study of the dynamics of random walks on weighted networks is missing while most of real networks are weighted characterized by capacities or strengths instead of a binary state (present or absent) [19, 20, 21, 22, 23, 24]. In the weighted networks, a weight  $w_{ij}$  is assigned to the edge connecting the vertices  $i$  and  $j$ , and the strength of the vertex  $i$  can be defined as

$$s_i = \sum_{j \in \nu(i)} w_{ij}, \quad (1)$$

where the sum runs over the set  $\nu(i)$  of neighbors of  $i$ . The strength of a node integrates the information about its connectivity and the weights of its links.

In this paper we study the dynamics of random walk processes on weighted networks by means of BBV model

[22]. The model starts from an initial number of completely connected vertices  $m_0$  with a same assigned weight  $w_0$  to each link. At each subsequent time step, addition of a new vertex  $n$  with  $m_0$  edges and corresponding modification in weights are implemented by the following two rules: (i) The new vertex  $n$  is attached at random to a previously existing vertex  $i$  with the probability that is proportional to the strength of node  $i$ ,  $s_i / \sum_j s_j$ , implying new vertices connect more likely to vertices handling larger weights. (ii) The additional induced increase  $\delta$  in strength  $s_i$  of the  $i$ th vertex is distributed among its nearest neighbors  $j \in \mathcal{V}(i)$  according to the rule

$$w_{ij} \rightarrow w_{ij} + \delta \frac{w_{ij}}{s_i}, \quad (2)$$

which considers that the establishment of a new edge of weight  $w_0$  with the vertex  $i$  induces a total increase of traffic  $\delta$  that is proportionally distributed among the edges departing from the vertex according to their weights. The BBV model suggests two ingredients of self-organization of weighted networks, strength preferential attachment and weight evolving dynamics [22]. Considering an arbitrary finite weighted network which consists of nodes  $i = 1, \dots, N$  and links connecting them. The connectivity is represented by the adjacency matrix  $\mathbf{A}$  whose element  $a_{ij} = 1$  if there is a link from  $i$  to  $j$ , and  $a_{ij} = 0$  otherwise. The information of edges weight is represented by matrix  $\mathbf{W}$  whose element  $w_{ij}$  is the weight of the edge between  $i$  and  $j$ . We restrict ourselves to an undirected network  $a_{ij} = a_{ji}$  and symmetrical edge's weight  $w_{ij} = w_{ji}$ .

Assuming that edge's weight and node's strength are used as local information by a random walker, we define two kinds of walks, weight-dependent walk and strength-dependent walk. For weight-dependent walk, a walker chooses one of its nearest neighbors with the probability that is proportional to the weight of edge linked them. The transition probability from node  $i$  to its neighbor  $j$  is

$$p_{i \rightarrow j}^w = \frac{w_{ij}}{s_i}. \quad (3)$$

---

\*For correspondence: yhwang@lzu.edu.cn

When time becomes infinite, one can find the walker staying at node  $i$  with the probability  $P_i^w$ , which is defined as the stationary distribution. Following the ideas developed by Noh and Rieger [16], we can write

$$P_i^w = \frac{s_i}{\sum_j s_j}, \quad (4)$$

namely, the larger strength a node has, the more often it will be visited by a random walker.

For strength-dependent walk, a walker at node  $i$  at time  $t$  selects one of its neighbors with the probability which is proportional to the selected node's strength to which it hops at time  $t+1$ . The transition probability from node  $i$  to its neighbor  $j$  is

$$P_{i \rightarrow j}^s = \frac{s_j a_{ij}}{s_i'}, \quad (5)$$

where  $s_i' = \sum_{l \in \nu(i)} s_l$  and  $\nu(i)$  denotes the set of all neighboring vertices of node  $i$ . Supposing that a walker starts at node  $i$ , and the probability that the walker at node  $k$  after  $t$  time steps denoted by  $P_{ik}^s(t)$ , then the master equation for the probability  $P_{i \rightarrow j}^s$  to find the walker at node  $j$  at time  $t+1$  is

$$P_{i \rightarrow j}^s(t+1) = \sum_k \frac{s_j a_{kj}}{s_k'} P_{ik}^s(t). \quad (6)$$

An explicit expression for the transition probability  $P_{i \rightarrow j}^s(t)$  to go from node  $i$  to node  $j$  in  $t$  steps follows by iterating Eq. (6)

$$P_{i \rightarrow j}^s(t) = \sum_{j_1, \dots, j_{t-1}} \frac{s_{j_1} a_{ij_1}}{s_i'} \cdot \frac{s_{j_2} a_{j_1 j_2}}{s_{j_1}'} \dots \frac{s_j a_{j_{t-1} j}}{s_{j_{t-1}}'}. \quad (7)$$

Comparing the expressions for  $P_{i \rightarrow j}^s(t)$  and  $P_{j \rightarrow i}^s(t)$ , we get

$$s_i s_i' P_{i \rightarrow j}^s(t) = s_j s_j' P_{j \rightarrow i}^s(t). \quad (8)$$

This is a direct consequence of the undirectedness of the network. We can also define the probability  $P_i^s$  as the stationary distribution when the evolving time becomes infinite. Eq. (8) implies that  $s_i s_i' P_j^s = s_j s_j' P_i^s$ , and therefore one can obtain [16]

$$P_i^s = \frac{s_i s_i'}{\sum_l s_l s_l'}. \quad (9)$$

Now we discuss the stationary distribution for edges, i.e., the probability that an edge is chosen by the walker to follow as the evolving time becomes infinite. In unweighted networks, all edges are equal and a random walker will choose one of its neighboring edges at the same probability. So each edge in the network has the same probability to be chosen by the walker when  $t \rightarrow \infty$  for weight-dependent walk. In weighted networks, however, the walker will choose an edge according to the weight of it or the strength of the node connected by

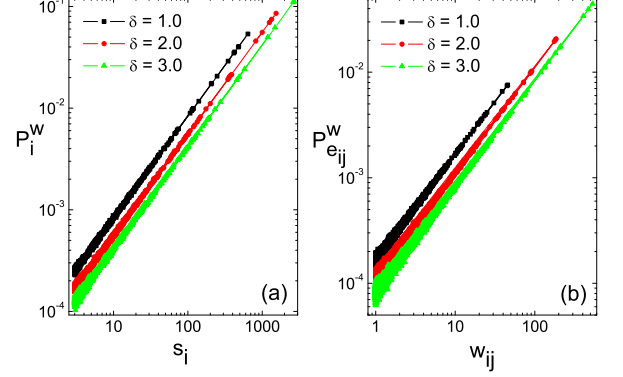


FIG. 1: Log-log plots of  $P_i^w$  vs.  $s_i$  (a) and  $P_{e_{ij}}^w$  vs.  $w_{ij}$  (b) in the BBV network with  $N = 1000$ ,  $m_0 = 3$  and different values of  $\delta$ . Slopes of all the curves are equal to  $0.9999 \pm 0.0006$ . The data were obtained after walking  $10^8$  steps on the network.

it. Then the relation between the stationary distribution for edges  $P_{e_{ij}}$  and the stationary distribution for nodes  $P_i$  can be written as

$$P_{e_{ij}} = P_i P_{i \rightarrow j} + P_j P_{j \rightarrow i}, \quad (10)$$

where  $P_{i \rightarrow j}$  is the transition probability from node  $i$  to node  $j$ . For weight-dependent walk, substituting Eqs. (3) and (4) into Eq. (10), we obtain the stationary distribution for edges

$$P_{e_{ij}}^w = \frac{2w_{ij}}{\sum_{k,l} w_{kl}}. \quad (11)$$

For strength-dependent walk, substituting Eqs. (5) and (9) into Eq. (10), we obtain the stationary distribution for edges

$$P_{e_{ij}}^s = \frac{2s_i s_j}{\sum_{k,l} s_k s_l a_{kl}}. \quad (12)$$

In Fig. 1 we plot  $P_i^w$  vs.  $s_i$  (Fig. 1(a)) and  $P_{e_{ij}}^w$  vs.  $w_{ij}$  (Fig. 1(b)) in log-log scale in the BBV network. The power-law property of Eqs. (4) and (11) is presented in excellent agreement with the numerical results. In Fig. 2 we show the log-log plots of  $P_i^s$  vs.  $s_i s_i'$  (Fig. 2(a)) and  $P_{e_{ij}}^s$  vs.  $s_i s_j$  (Fig. 2(b)) in the BBV model. The numerical results are also in good agreement with Eqs. (9) and (12).

Next we study average return time which is the average time spent by a walker to return to its origin. From its definition, we can easily obtain that the average return time is equal to the reciprocal of the stationary distribution. The average return time for node  $i$  is

$$\langle T_{ii}^w \rangle = \frac{1}{P_i^w} = \frac{\sum_j s_j}{s_i}, \quad (13)$$

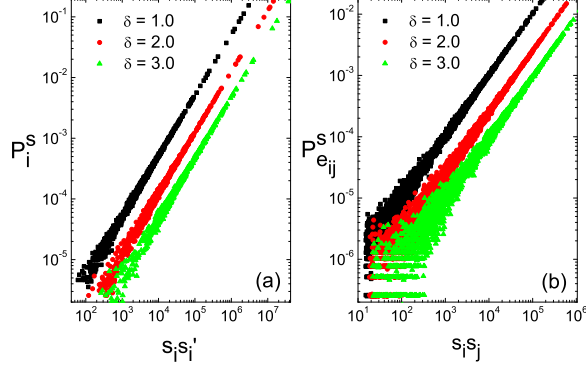


FIG. 2: Log-log plots of  $P_i^s$  vs.  $s_i s_i'$  (a) and  $P_{e_{ij}}^s$  vs.  $s_i s_j$  (b) in the BBV network with  $N = 1000$ ,  $m_0 = 3$  and different values of  $\delta$ . Slopes of all the curves are equal to  $1.018 \pm 0.003$ . The data were obtained after walking  $10^8$  steps on the network.

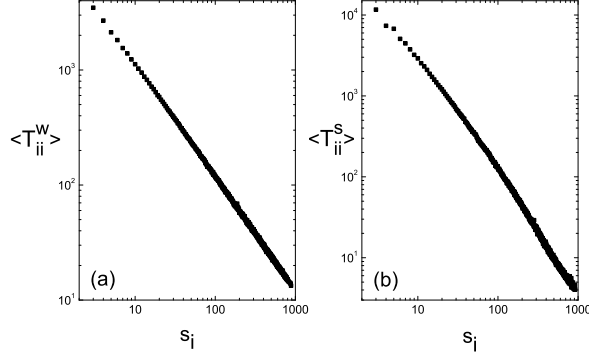


FIG. 3: Numerical results for the average return time of node for the two different walks, weight-dependent walk (a) and strength-dependent walk (b), on the BBV network with  $N = 1000$ ,  $m_0 = 3$  and  $\delta = 1.0$ . The data were averaged on 1000 networks and obtained after walking  $10^6$  steps in each network.

for weight-dependent walk and

$$\langle T_{ii}^s \rangle = \frac{1}{P_i^s} = \frac{\sum_j s_j s_j'}{s_i s_i'}. \quad (14)$$

for strength-dependent walk, respectively.

In Fig. 3 we show the log-log plots of  $\langle T_{ii}^w \rangle$  vs.  $s(i)$  and  $\langle T_{ii}^s \rangle$  vs.  $s(i)$  in the BBV networks. The slope of the curve in Fig. 3(a) is  $-0.9903 \pm 0.0007$ , consistent with Eq. (13). The BBV networks have two properties in [22]: (i) node's strength is proportional to node's degree,  $s_i \sim k_i$ ; (ii) the average nearest neighbor degree is  $k_{nn}(k) \sim k^{-2+1/\beta}$  with  $\beta = (2\delta+1)/(2\delta+2)$ . Considering these two ingredients, one can observe that  $s_i s_i' \sim s_i^{1/\beta}$ , and obtain  $\langle T_{ii}^s \rangle \sim s_i^{-1/\beta}$ . Fig. 3(b) gives that  $-1/\beta = -1.355 \pm$

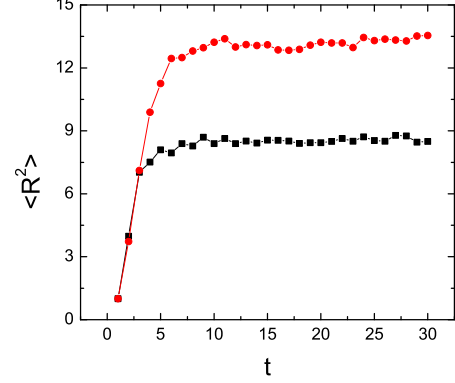


FIG. 4: Mean-square displacement  $\langle R^2 \rangle$  as a function of time  $t$  for two kinds of walks, weight-dependent walk (closed circles) and strength-dependent walk (closed squares), on the BBV network with  $N = 10^5$ ,  $m_0 = 3$ , and  $\delta = 1.0$ . All the plots were averaged over 1000 different initial positions of the walker and 100 realizations of the network.

0.006 which agrees with the theoretical value  $-1/\beta = -(2\delta+2)/(2\delta+1) = 4/3$ .

Using the same methods, the average return time for edge  $e_{ij}$  can also be obtained

$$\langle T_{e_{ij}}^w \rangle = \frac{\sum_{k,l} w_{kl}}{2w_{ij}}, \quad (15)$$

for weight-dependent walk and

$$\langle T_{e_{ij}}^s \rangle = \frac{\sum_{k,l} s_k s_l a_{kl}}{2s_i s_j}. \quad (16)$$

for strength-dependent walk, respectively.

To complete the study of random walks on the weighted networks, we will present our simulation results for two quantities, the mean-square displacement  $\langle R^2 \rangle$ , and the average number of distinct sites visited  $N_{cov}$ . The mean-square displacement is a measure of the distance  $R$  covered by a typical random walker after performing  $t$  steps [13, 17]. To calculate this quantity we first, at each time step, find the minimal distance from the current position of the walker to the origin (i.e., the smallest number of steps needed for the walker to reach the origin) using a breadth-first search method. Then we allow the walker to move through the network until  $\langle R^2 \rangle$  has saturated. Finally, we average over different initial positions of the walker and realizations of the network. Fig. 4 shows the results of  $\langle R^2 \rangle$  as a function of time  $t$ . We note that  $\langle R^2 \rangle$  equilibrates after a few steps to a constant displacement value. This is a simple manifestation of the very small diameter of the BBV network. Note also that the value of plateau is higher for weight-dependent walk than that for strength-dependent walk. That is, a weight-dependent walker can arrive at new

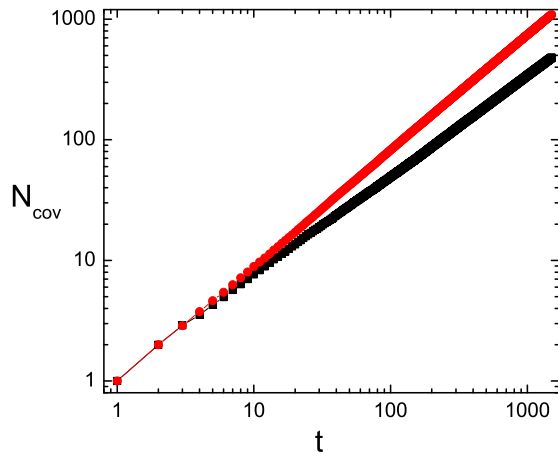


FIG. 5: Number of distinct sites visited  $N_{cov}$  after  $t$  steps for two kinds of walks, weight-dependent walk (closed circles) and strength-dependent walk (closed squares), on the BBV network with  $N = 10^5$ ,  $m_0 = 3$  and  $\delta = 1.0$ . All the plots were averaged over 1000 different initial positions of the walker and 100 realizations of the network.

territory more easily than a strength-dependent walker. The coverage of the network by random walks found to be a very efficient process can be expressed by the average number of distinct sites visited  $N_{cov}$  after  $t$  steps. Simulation results of  $N_{cov}$  in the BBV network for two different walks are presented in Fig. 5. To decrease fi-

nite size effects, the number of steps performed was two orders of magnitude smaller than the size of the network used ( $N = 10^5$ ). One can find that the coverage of the network for weight-dependent walk is more efficient than strength-dependent walk. The number of sites visited increases initially with a slow rate, but after a crossover value the increase is almost linear, like in scale-free networks [17]. The crossover point shifts toward longer times for strength-dependent walk. The early time means that the walkers initially spend some time exploring the neighborhood they were created in and visit the same sites. After the first few steps they escape their initial territory and diffuse around the entire network. Thus it is possible to continuously visit new sites, which results in the linear increase of  $N_{cov}$ .

In summary, we have studied two different types of walks on weighted networks, weight-dependent walk and strength-dependent walk. We derived exact expressions for the stationary distribution and the average return time for the two walk processes, and confirmed them by simulations on BBV networks. Then we computed the mean-square displacement  $\langle R^2 \rangle$  and the average number of distinct sites visited  $N_{cov}$  on the BBV model. For both walks,  $\langle R^2 \rangle$  was found to reach the saturation after a few time steps which is a result of the very small diameter of the underlying graph. On the other hand, there is a power-law relation between  $N_{cov}$  and  $t$ . Furthermore, the behaviors of two quantities,  $\langle R^2 \rangle$  and  $N_{cov}$ , imply that weight-dependent walk is more efficient than strength-dependent walk. Namely, a weight-dependent walker can arrive at new territory more easily than a strength-dependent walker.

- 
- [1] F. Spitzer, *Principles of Random Walk*, 2nd ed. (Springer-Verlag, New York, 1976).
  - [2] M.N. Barber and B.W. Ninham, *Random and Restricted Walks* (Gordon and Breach, New York, 1970).
  - [3] R.D. Hughes, *Random Walks and Random Environments* (Clarendon, Oxford, 1996), Vols. 1 and 2.
  - [4] P. Erdős and A. Rényi, *Publ. Math.* **6**, 290 (1959); *Publ. Math. Inst. Hung. Acad. Sci.* **5**, 17 (1960).
  - [5] D.J. Watts and S.H. Strogatz, *Nature* **393**, 440 (1998).
  - [6] A.-L. Barabási and R. Albert, *Science* **286**, 509 (1999); A.-L. Barabási, R. Albert, and H. Jeong, *Physica A* **272**, 173 (1999).
  - [7] D.J. Watts, *Small Worlds: The Dynamics of Networks Between Order and Randomness* (Princeton University Press, New Jersey, 1999).
  - [8] S.N. Dorogovtsev and J.F.F. Mendes, *Adv. Phys.* **51**, 1079 (2002).
  - [9] M.E.J. Newman, *SIAM Rev.* **45**, 167 (2003).
  - [10] S.H. Strogatz, *Nature (London)* **410**, 268 (2001).
  - [11] S.A. Pandit and R.E. Amritkar, *Phys. Rev. E* **63**, 041104 (2001).
  - [12] J. Lahtinen, J. Kertész, and K. Kaski, *Phys. Rev. E* **64**, 057105 (2001).
  - [13] E. Almaas, R.V. Kulkarni, and D. Stroud, *Phys. Rev. E* **68**, 056105 (2003).
  - [14] P.E. Parris and V.M. Kenkre, *Phys. Rev. E* **72**, 056119 (2005).
  - [15] L.A. Adamic, R.M. Lukose, A.R. Puniyani, and B.A. Huberman, *Phys. Rev. E* **64**, 046135 (2001).
  - [16] J.D. Noh and H. Rieger, *Phys. Rev. Lett.* **92**, 118701 (2004); *Phys. Rev. E* **69**, 036111 (2004); *cond-mat/0509564*.
  - [17] L.K. Gallos, *Phys. Rev. E* **70**, 046116 (2004).
  - [18] S.-J. Yang, *Phys. Rev. E* **71**, 016107 (2005).
  - [19] S.H. Yook, H. Jeong, and A.-L. Barabási, and Y. Tu, *Phys. Rev. Lett.* **86**, 5835 (2001).
  - [20] D. Zheng, S. Trimper, B. Zheng, and P.M. Hui, *Phys. Rev. E* **67**, 040102(R) (2003).
  - [21] K. Park, Y.-C. Lai, and N. Ye, *Phys. Rev. E* **70**, 026109 (2004).
  - [22] A. Barrat, M. Barthélemy, R. Pastor-Satorras, and A. Vespignai, *Proc. Natl. Acad. Sci. USA* **101**, 3747 (2004); A. Barrat, M. Barthélemy, and A. Vespignani, *Phys. Rev. Lett.* **92**, 228701 (2004); *Phys. Rev. E* **70**, 066149 (2004).
  - [23] Z.-X. Wu, X.-J. Xu, and Y.-H. Wang, *Phys. Rev. E* **71**, 066124 (2005).
  - [24] R. Guimera, S. Mossa, A. Turttschi, and L.A.N. Amaral, *Proc. Natl. Acad. Sci. USA* **102**, 7794 (2005).