

Automatic Annotation of XHTML Pages with Audio Components

Paul Ioan Fodor

Stony Brook University

Stony Brook, NY 11794

pfodor@cs.sunysb.edu

ABSTRACT

In the past ten years, significant research effort was invested in audio browsers, programs able to decode the structure of Web pages and put them into an audio format. Few advanced browsers use machine learning algorithms to classify objects on the Web page and learn browsing behaviors, have multimodal input and outputs and are able to synchronize between the graphical and audio modalities to interact with the Web page. The disadvantages of these audio browsers include the necessity of a high computation power since the user's machine has to decode the structure of the Web page, and, therefore, making impossible the installation of such programs on mobile devices.

In this paper, we propose a simpler and more efficient solution for the creation of a multimodal application. We developed a middleware that automatically annotates Web pages with VoiceXML generated from the content of the Web page. Using our system, the user can interact with the Web page, by using voice or graphical commands, can listen and/or watch digital content, such as news, blogs Web pages, podcasts, and even access emails and personal schedules. Our system is beneficial for a wide range of applications: from interfaces for the visual impaired users to browsers for mobile telephonic interfaces.

Categories and Subject Descriptors

H.5.2 [Information Interfaces and Presentation]: User Interfaces - *Natural language, Voice I/O.*

General Terms

Design.

Keywords: multimodal interfaces.

1. INTRODUCTION

Most audio browsers existent today (e.g. GW Micro Window Eyes [1], IBM Home Page Reader [2], Freedom Scientific Jaws [3], the systems from the W3c Alternative Web Browsing initiative [4]) are sequential screen readers. Few advanced browsers use multimodal input and outputs, or are able to synchronize between the graphical and audio modalities to interact with the Web page. In this poster, we present our

approach to multimodal automatic annotation to Web pages and evaluate the system based on interaction speed and the user's experience.

2. METHODS

The structure of our middleware is depicted in Figure 1. The client connects to a middleware Web site and provides the Web page that he/she wants to access. The middleware application server collects the Web page, identifies the components in the HTML code and annotates them with VoiceXML (see the example in Figure 2). The system synchronizes the XHTML code with VoiceXML components using "sync components". This way, the user can interact with the Web page in two different ways: using the graphical components in the Web page or using the voice tools existent in the Opera browser. Since this interaction is synchronized, the user can interleave the modalities.

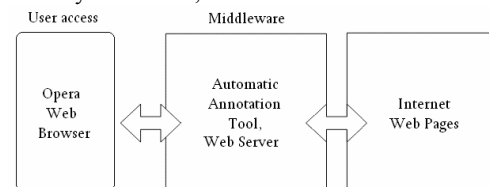


Figure 1. Automatic Annotation Architecture

```
<select name="participants" id="participants" multiple="multiple" size="10" width="100">
  <option> Anton, Tudor </option>
  <option> Cesar, Brian </option>
  <option> Danniels, David </option>
  <option> Tejada, Jose </option>
</select>
```

a. An HTML example

```
<?xml version="1.0" encoding="iso-8859-1">
<!DOCTYPE html PUBLIC "-//VoiceXML Forum//DTD XHTML+Voice 1.2//EN"
"http://www.voicexml.org/specs/multimodal/xv12/dtd/xhtml+voice12.dtd">

<html xmlns="http://www.w3.org/1999/xhtml"
      xmlns:vm="http://www.w3.org/2001/vxml"
      xmlns:ev="http://www.w3.org/2001/xml-events"
      xmlns:xv="http://www.voicexml.org/2002/xhtml+voice"
      xml:lang="en-US">

  <head>
    ...
    <vxml:form id="scheduler_meeting_form">
      ...
      <vxml:field name="voice_participants_name" xvid="voice_participants_name" modal="true">
        <vxml:grammar>
          <![CDATA[
            $USOF V1.0 iso-8859-1:
            grammar participants:
              public <participant> = <NULL> ( { $= new Array; } { <participant> [and] ( { $.push($participant) } ) }+;
              <participant> = Anton, Tudor ( { $="Anton, Tudor" } |
                                Cesar, Brian ( { $="Cesar, Brian" } |
                                Danniels, David ( { $="Danniels, David" } |
                                Tejada, Jose ( { $="Tejada, Jose" } |
                                ... }
          ]]]>
        </vxml:grammar>
        <vxml:prompt bargein="true">
          Please say the participants.
        </vxml:prompt>
        <vxml:catch event="noinput">
          Sorry, I did not hear you. Please say the participants.
        </vxml:catch>
        <vxml:catch event="nomatch">
          Sorry, I did not understand you. Please say the participants.
        </vxml:catch>
        <vxml:field>
          ...
        </vxml:form>
        ...
        <xv:sync xv:field="#voice_participants_name" xv:input="participants"/>
      </head>
```

b. XHTML+VoiceXML

Figure 2. VoiceXML Annotation

The components of the Web pages (i.e. the inputs, the outputs and the links to the following pages) are extracted from the Web page source and a tree is created with all possible dialog routes. The words are extracted from the collected HTML and are searched in a list of possible shortcuts and a ranking weight can

be given to certain entries based on these words. This way, the user can search for a certain subset of entries in the Web page by only pronouncing shortcut words. The grammar is automatically generated from the title of the entries in the Web page.

Additional VoiceXML units are added for verification purposes (see Figure 3).




Figure 3. Verification audio component

3. COMPARISONS AND RELATED WORK

We tested our system on a simple case in which the user was dealing with transformed news and blog Web pages into XHTML+VoiceXML Web pages, and a more complex dialog for consulting a schedule (see Figure 4). In all experiments, the input was achieved only through the audio input. In the complex application, Web developers used dynamic HTML, Javascript DOM and AJAX to update the results on the same Web page. However, since the generated voice components were synchronized with the HTML inputs, the result was the same for the dynamic output component.

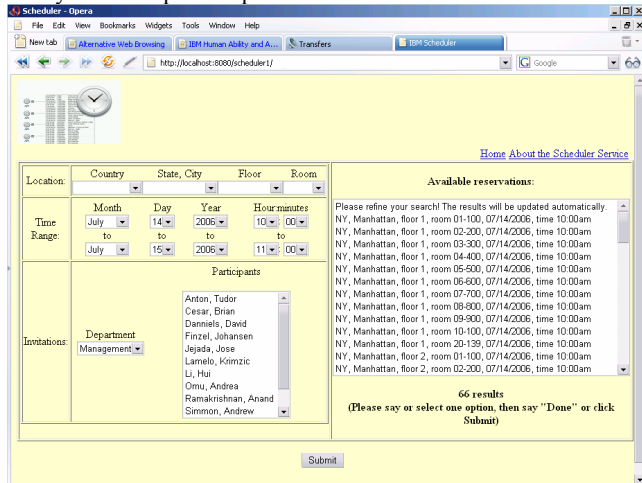


Figure 4. Multimodal Scheduler in Opera Browser

We compared our system with GW Micro Window Eyes, currently, one of the most common used screen readers. Other screen readers deliver the same set of characteristics with this product. We used two metrics to compare our system with Window Eyes. First, we measured the average time to select the desired information and to complete one successful atomic step of interaction (considering the task completion success rate as 100%)

(see Figure 5). Second, we measured the quality cost, as the users' perception of the system. The user's satisfaction rating was computed by having users complete a survey at the end of the experiment (see Figure 6). In all the experiments we obtained results similar to the standard audio browser.

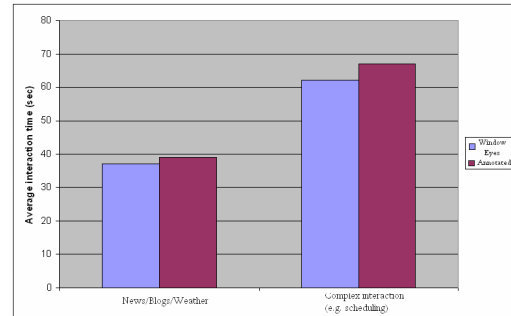


Figure 5. Average time to select the desired information from one page or to complete one successful atomic step of interaction

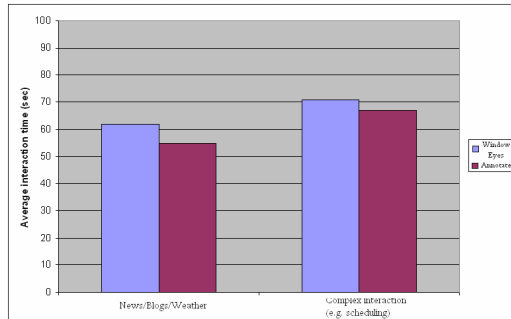


Figure 6. User satisfaction

4. CONCLUSIONS

We achieved our objective to provide an automatic annotation with audio components for Web pages by using a middleware server and the Opera Browser for mobile devices. This provided similar results to the audio browser, but did not require additional software on the client device.

5. REFERENCES

- [1] Window Eyes, by GW Micro, <http://www.gwmicro.com>.
- [2] IBM Home Page Reader, <http://www-03.ibm.com/able/>.
- [3] Jaws, by Freedom Scientific, <http://www.freedomscientific.com>.
- [4] W3c Alternative Web Browsing initiative, <http://www.w3.org/WAI/References/Browsing>.